

Shimaden Lite

Shimaden Controllers and Shimaden Lite software working together to offer one of the most user friendly and advanced packages available.

Data Hiway

RS232 to 485 converter
OR
RS232 to 422 converter

2100 IS = RS422 & RS485
2100 NS = RS422 only




PC



Shimaden Controllers/Indicators

FP21
SR25
SR253 (RS485 not supported)
SR50
SR73A/74A
SR80 (RS422 not available)
MR13 (RS422 not available)
SD16 (RS422 not available)
SD20
SR90 (RS422 not available)
FP93 (RS422 not available)

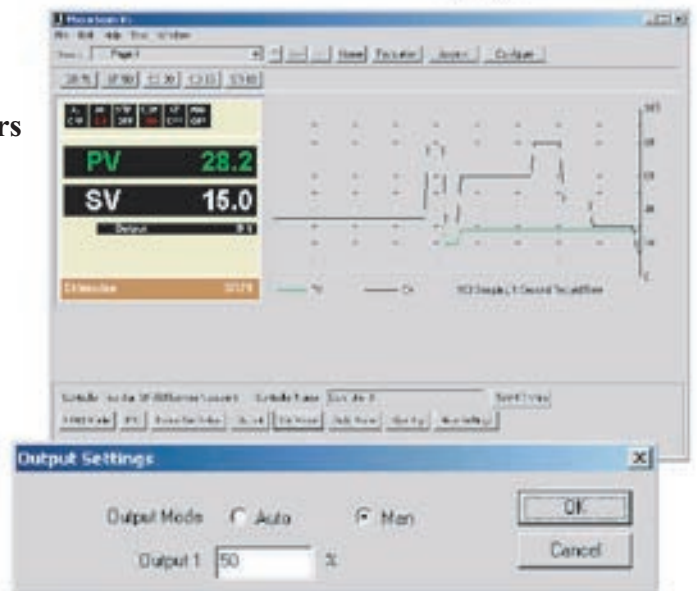

Features:

- Auto seek: Find controllers automatically.
- Auto configuration: MicroScan automatically adopts controller configuration.
- User friendly controller configuration from computer.
- Password protection.
- Trend graph of PV & SV.
- Trend graph has most re
- Scan settings 1 sec, 15 sec, 1 min.
- Controller identification label.
- Alert window for showing status of controller events.
- Recording function into CSV Report for viewing data.

Note:

- MR13 has no SV facility from computer.
- 2100-IS / 2100-NS not required when using RS232.
- RS232 will connect to one controller only.