

°C	CP3700 SERIES SIGNAL CONVERTERS
%RH	
SHIMADEN	



CE approved

- | | |
|---|---|
| CP3701 Thermocouple Temperature Converter | CP3720 CT Transmitter (Rms Calculation) |
| CP3702 R.T.D. Temperature Converter | CP3721 PT Transmitter (Rms Calculation) |
| CP3703 mV DC-DC Converter | CP3729 DC-frequency (pulse) Converter |
| CP3704 V/mA DC-DC-Converter | CP3737 Distributor (Non-Isolation between Input and Output) |
| CP3705 Alarm Setter (Dual Points) | CP3740 Signal Reverser |
| CP3707 Distributor (with Isolation) | CP3761 Adder |
| CP3708 Frequency/DC Converter | CP3762 Subtractor |
| CP3710 Potentiometer Converter | CP3764 Signal Isolator |
| CP3713 Square-Root Extractor | CP3765 Multiplier (Arithmetic Operation Unit) |
| CP3714 Limiter | CP3766 Analog hold Converter |
| CP3716 Change-rate Limiting Converter | |

BASIC FEATURES


- Slim-shaped plug-in converter with isolated single/dual- output***
- DIN Rail mounting or Lateral mounting***
- Power supply 100 to 240V AC or 24V DC***
- Moisture-proof coating is applied as standard.***
- Gold-plated socket contacts***

COMMON SPECIFICATIONS

- Power supply : 100 to 240V AC $\pm 10\%$ or 24V DC $\pm 10\%$
- Voltage tolerance : 100 to 240V AC: 85 to 264V AC 47 to 63Hz
24V DC: 24V DC $\pm 10\%$
- Operating ambient
 - Temperature : -5 to 55 °C
 - Humidity : 5 to 90%RH (No dew condensation)
- Stock temperature : -10 to 60 °C
- Installation : Wall / DIN rail mounting
Wiring / M3.5 screw terminal connection (with a power terminal block cover & drop-proof screws)
Screwing Torque / 0.8 to 1.0 [Nm] * Recommended
- Materials : Housing: ABS resin (UL94V-0)
Terminal block: PBT resin (UL94V-0)
Terminal block cover: PC resin (UL94V-2)
Din-rail stopper: PP resin (UL94-HB)
- External dimensions : H86×W29×D125 mm (including the mounting screw and socket terminal board)
(Refer to the last page for external dimensions and mounting dimensions.)
- Weight : Main body: 120g max.
Terminal block: 80g max

TERMINAL ARRANGEMENT DIAGRAM/SIGNAL ASSIGNMENT

■ TERMINAL ARRANGEMENT ■ SIGNAL ASSIGNMENT

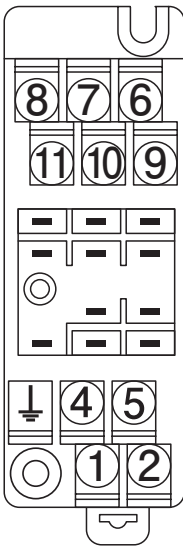 <p>SOCKET TOP VIEW</p>	Common to CP3700 series	CP3701	CP3702	CP3703/3704/3713/3714/ 3716/ 3729/3737/3740																																																																																																		
	<table border="1"> <tr><td>1</td><td>P (+)</td><td>POWER</td></tr> <tr><td>2</td><td>N (-)</td><td>POWER</td></tr> <tr><td>↓</td><td>GND</td><td></td></tr> <tr><td>4</td><td>+</td><td>OUTPUT 1</td></tr> <tr><td>5</td><td>-</td><td>OUTPUT 1</td></tr> <tr><td>6</td><td>N. C.</td><td></td></tr> <tr><td>7</td><td>+</td><td>OUTPUT 2</td></tr> <tr><td>8</td><td>-</td><td>OUTPUT 2</td></tr> <tr><td>9</td><td>T. C. +</td><td></td></tr> <tr><td>10</td><td>T. C. -</td><td></td></tr> <tr><td>11</td><td>N. C.</td><td></td></tr> </table>	1	P (+)	POWER	2	N (-)	POWER	↓	GND		4	+	OUTPUT 1	5	-	OUTPUT 1	6	N. C.		7	+	OUTPUT 2	8	-	OUTPUT 2	9	T. C. +		10	T. C. -		11	N. C.		<table border="1"> <tr><td>1</td><td>P (+)</td><td>POWER</td></tr> <tr><td>2</td><td>N (-)</td><td>POWER</td></tr> <tr><td>↓</td><td>GND</td><td></td></tr> <tr><td>4</td><td>+</td><td>OUTPUT 1</td></tr> <tr><td>5</td><td>-</td><td>OUTPUT 1</td></tr> <tr><td>6</td><td>N. C.</td><td></td></tr> <tr><td>7</td><td>+</td><td>OUTPUT 2</td></tr> <tr><td>8</td><td>-</td><td>OUTPUT 2</td></tr> <tr><td>9</td><td>A RTD</td><td></td></tr> <tr><td>10</td><td>B RTD</td><td></td></tr> <tr><td>11</td><td>B' RTD</td><td></td></tr> </table>	1	P (+)	POWER	2	N (-)	POWER	↓	GND		4	+	OUTPUT 1	5	-	OUTPUT 1	6	N. C.		7	+	OUTPUT 2	8	-	OUTPUT 2	9	A RTD		10	B RTD		11	B' RTD		<table border="1"> <tr><td>1</td><td>P (+)</td><td>POWER</td></tr> <tr><td>2</td><td>N (-)</td><td>POWER</td></tr> <tr><td>↓</td><td>GND</td><td></td></tr> <tr><td>4</td><td>+</td><td>OUTPUT 1</td></tr> <tr><td>5</td><td>-</td><td>OUTPUT 1</td></tr> <tr><td>6</td><td>N. C.</td><td></td></tr> <tr><td>7</td><td>+</td><td>OUTPUT 2</td></tr> <tr><td>8</td><td>-</td><td>OUTPUT 2</td></tr> <tr><td>9</td><td>+</td><td>INPUT</td></tr> <tr><td>10</td><td>-</td><td>INPUT</td></tr> <tr><td>11</td><td>N. C.</td><td></td></tr> </table> <p>For Output 1, the pins of terminal nos. 7 & 8 are N.C.</p>	1	P (+)	POWER	2	N (-)	POWER	↓	GND		4	+	OUTPUT 1	5	-	OUTPUT 1	6	N. C.		7	+	OUTPUT 2	8	-	OUTPUT 2	9	+	INPUT	10	-	INPUT	11	N. C.	
	1	P (+)	POWER																																																																																																			
	2	N (-)	POWER																																																																																																			
	↓	GND																																																																																																				
	4	+	OUTPUT 1																																																																																																			
	5	-	OUTPUT 1																																																																																																			
	6	N. C.																																																																																																				
	7	+	OUTPUT 2																																																																																																			
	8	-	OUTPUT 2																																																																																																			
9	T. C. +																																																																																																					
10	T. C. -																																																																																																					
11	N. C.																																																																																																					
1	P (+)	POWER																																																																																																				
2	N (-)	POWER																																																																																																				
↓	GND																																																																																																					
4	+	OUTPUT 1																																																																																																				
5	-	OUTPUT 1																																																																																																				
6	N. C.																																																																																																					
7	+	OUTPUT 2																																																																																																				
8	-	OUTPUT 2																																																																																																				
9	A RTD																																																																																																					
10	B RTD																																																																																																					
11	B' RTD																																																																																																					
1	P (+)	POWER																																																																																																				
2	N (-)	POWER																																																																																																				
↓	GND																																																																																																					
4	+	OUTPUT 1																																																																																																				
5	-	OUTPUT 1																																																																																																				
6	N. C.																																																																																																					
7	+	OUTPUT 2																																																																																																				
8	-	OUTPUT 2																																																																																																				
9	+	INPUT																																																																																																				
10	-	INPUT																																																																																																				
11	N. C.																																																																																																					
CP3705	CP3707	CP3708																																																																																																				
<table border="1"> <tr><td>1</td><td>P (+)</td><td>POWER</td></tr> <tr><td>2</td><td>N (-)</td><td>POWER</td></tr> <tr><td>↓</td><td>GND</td><td></td></tr> <tr><td>4</td><td>NC</td><td>OUT 1</td></tr> <tr><td>5</td><td>NO</td><td>OUT 1</td></tr> <tr><td>6</td><td>COM</td><td>OUT 1</td></tr> <tr><td>7</td><td>COM</td><td>OUT 2</td></tr> <tr><td>8</td><td>NO</td><td>OUT 2</td></tr> <tr><td>9</td><td>+</td><td>INPUT</td></tr> <tr><td>10</td><td>-</td><td>INPUT</td></tr> <tr><td>11</td><td>NC</td><td>OUT 2</td></tr> </table>	1	P (+)	POWER	2	N (-)	POWER	↓	GND		4	NC	OUT 1	5	NO	OUT 1	6	COM	OUT 1	7	COM	OUT 2	8	NO	OUT 2	9	+	INPUT	10	-	INPUT	11	NC	OUT 2	<table border="1"> <tr><td>1</td><td>P (+)</td><td>POWER</td></tr> <tr><td>2</td><td>N (-)</td><td>POWER</td></tr> <tr><td>↓</td><td>GND</td><td></td></tr> <tr><td>4</td><td>+</td><td>OUTPUT 1</td></tr> <tr><td>5</td><td>-</td><td>OUTPUT 1</td></tr> <tr><td>6</td><td>N. C.</td><td></td></tr> <tr><td>7</td><td>+</td><td>OUTPUT 2</td></tr> <tr><td>8</td><td>-</td><td>OUTPUT 2</td></tr> <tr><td>9</td><td>+</td><td>INPUT</td></tr> <tr><td>10</td><td>-</td><td>INPUT</td></tr> <tr><td>11</td><td>COM</td><td></td></tr> </table>	1	P (+)	POWER	2	N (-)	POWER	↓	GND		4	+	OUTPUT 1	5	-	OUTPUT 1	6	N. C.		7	+	OUTPUT 2	8	-	OUTPUT 2	9	+	INPUT	10	-	INPUT	11	COM		<table border="1"> <tr><td>1</td><td>P (+)</td><td>POWER</td></tr> <tr><td>2</td><td>N (-)</td><td>POWER</td></tr> <tr><td>↓</td><td>GND</td><td></td></tr> <tr><td>4</td><td>+</td><td>OUTPUT 1</td></tr> <tr><td>5</td><td>-</td><td>OUTPUT 1</td></tr> <tr><td>6</td><td>N. C.</td><td></td></tr> <tr><td>7</td><td>+</td><td>OUTPUT 2</td></tr> <tr><td>8</td><td>-</td><td>OUTPUT 2</td></tr> <tr><td>9</td><td>+</td><td>INPUT</td></tr> <tr><td>10</td><td>-</td><td>INPUT</td></tr> <tr><td>11</td><td>EX</td><td></td></tr> </table> <p>For Output 1, the pins of terminal nos. 7 & 8 are N.C.</p>	1	P (+)	POWER	2	N (-)	POWER	↓	GND		4	+	OUTPUT 1	5	-	OUTPUT 1	6	N. C.		7	+	OUTPUT 2	8	-	OUTPUT 2	9	+	INPUT	10	-	INPUT	11	EX		
1	P (+)	POWER																																																																																																				
2	N (-)	POWER																																																																																																				
↓	GND																																																																																																					
4	NC	OUT 1																																																																																																				
5	NO	OUT 1																																																																																																				
6	COM	OUT 1																																																																																																				
7	COM	OUT 2																																																																																																				
8	NO	OUT 2																																																																																																				
9	+	INPUT																																																																																																				
10	-	INPUT																																																																																																				
11	NC	OUT 2																																																																																																				
1	P (+)	POWER																																																																																																				
2	N (-)	POWER																																																																																																				
↓	GND																																																																																																					
4	+	OUTPUT 1																																																																																																				
5	-	OUTPUT 1																																																																																																				
6	N. C.																																																																																																					
7	+	OUTPUT 2																																																																																																				
8	-	OUTPUT 2																																																																																																				
9	+	INPUT																																																																																																				
10	-	INPUT																																																																																																				
11	COM																																																																																																					
1	P (+)	POWER																																																																																																				
2	N (-)	POWER																																																																																																				
↓	GND																																																																																																					
4	+	OUTPUT 1																																																																																																				
5	-	OUTPUT 1																																																																																																				
6	N. C.																																																																																																					
7	+	OUTPUT 2																																																																																																				
8	-	OUTPUT 2																																																																																																				
9	+	INPUT																																																																																																				
10	-	INPUT																																																																																																				
11	EX																																																																																																					
CP3710	CP3720	CP3721																																																																																																				
<table border="1"> <tr><td>1</td><td>P (+)</td><td>POWER</td></tr> <tr><td>2</td><td>N (-)</td><td>POWER</td></tr> <tr><td>↓</td><td>GND</td><td></td></tr> <tr><td>4</td><td>+</td><td>OUTPUT 1</td></tr> <tr><td>5</td><td>-</td><td>OUTPUT 1</td></tr> <tr><td>6</td><td>N. C.</td><td></td></tr> <tr><td>7</td><td>+</td><td>OUTPUT 2</td></tr> <tr><td>8</td><td>-</td><td>OUTPUT 2</td></tr> <tr><td>9</td><td>A POT</td><td></td></tr> <tr><td>10</td><td>B POT</td><td></td></tr> <tr><td>11</td><td>C POT</td><td></td></tr> </table>	1	P (+)	POWER	2	N (-)	POWER	↓	GND		4	+	OUTPUT 1	5	-	OUTPUT 1	6	N. C.		7	+	OUTPUT 2	8	-	OUTPUT 2	9	A POT		10	B POT		11	C POT		<table border="1"> <tr><td>1</td><td>P (+)</td><td>POWER</td></tr> <tr><td>2</td><td>N (-)</td><td>POWER</td></tr> <tr><td>↓</td><td>GND</td><td></td></tr> <tr><td>4</td><td>+</td><td>OUTPUT 1</td></tr> <tr><td>5</td><td>-</td><td>OUTPUT 1</td></tr> <tr><td>6</td><td>(L) INPUT</td><td></td></tr> <tr><td>7</td><td>+</td><td>OUTPUT 2</td></tr> <tr><td>8</td><td>-</td><td>OUTPUT 2</td></tr> <tr><td>9</td><td>L INPUT</td><td></td></tr> <tr><td>10</td><td>N INPUT</td><td></td></tr> <tr><td>11</td><td>(N) INPUT</td><td></td></tr> </table>	1	P (+)	POWER	2	N (-)	POWER	↓	GND		4	+	OUTPUT 1	5	-	OUTPUT 1	6	(L) INPUT		7	+	OUTPUT 2	8	-	OUTPUT 2	9	L INPUT		10	N INPUT		11	(N) INPUT		<table border="1"> <tr><td>1</td><td>P (+)</td><td>POWER</td></tr> <tr><td>2</td><td>N (-)</td><td>POWER</td></tr> <tr><td>↓</td><td>GND</td><td></td></tr> <tr><td>4</td><td>+</td><td>OUTPUT 1</td></tr> <tr><td>5</td><td>-</td><td>OUTPUT 1</td></tr> <tr><td>6</td><td>N. C.</td><td></td></tr> <tr><td>7</td><td>+</td><td>OUTPUT 2</td></tr> <tr><td>8</td><td>-</td><td>OUTPUT 2</td></tr> <tr><td>9</td><td>N. C.</td><td></td></tr> <tr><td>10</td><td>L INPUT</td><td></td></tr> <tr><td>11</td><td>N INPUT</td><td></td></tr> </table>	1	P (+)	POWER	2	N (-)	POWER	↓	GND		4	+	OUTPUT 1	5	-	OUTPUT 1	6	N. C.		7	+	OUTPUT 2	8	-	OUTPUT 2	9	N. C.		10	L INPUT		11	N INPUT		
1	P (+)	POWER																																																																																																				
2	N (-)	POWER																																																																																																				
↓	GND																																																																																																					
4	+	OUTPUT 1																																																																																																				
5	-	OUTPUT 1																																																																																																				
6	N. C.																																																																																																					
7	+	OUTPUT 2																																																																																																				
8	-	OUTPUT 2																																																																																																				
9	A POT																																																																																																					
10	B POT																																																																																																					
11	C POT																																																																																																					
1	P (+)	POWER																																																																																																				
2	N (-)	POWER																																																																																																				
↓	GND																																																																																																					
4	+	OUTPUT 1																																																																																																				
5	-	OUTPUT 1																																																																																																				
6	(L) INPUT																																																																																																					
7	+	OUTPUT 2																																																																																																				
8	-	OUTPUT 2																																																																																																				
9	L INPUT																																																																																																					
10	N INPUT																																																																																																					
11	(N) INPUT																																																																																																					
1	P (+)	POWER																																																																																																				
2	N (-)	POWER																																																																																																				
↓	GND																																																																																																					
4	+	OUTPUT 1																																																																																																				
5	-	OUTPUT 1																																																																																																				
6	N. C.																																																																																																					
7	+	OUTPUT 2																																																																																																				
8	-	OUTPUT 2																																																																																																				
9	N. C.																																																																																																					
10	L INPUT																																																																																																					
11	N INPUT																																																																																																					
CP3761/3762/3765	CP3764	CP3766																																																																																																				
<table border="1"> <tr><td>1</td><td>P (+)</td><td>POWER</td></tr> <tr><td>2</td><td>N (-)</td><td>POWER</td></tr> <tr><td>↓</td><td>GND</td><td></td></tr> <tr><td>4</td><td>+</td><td>OUTPUT 1</td></tr> <tr><td>5</td><td>-</td><td>OUTPUT 1</td></tr> <tr><td>6</td><td>-</td><td>INPUT 2</td></tr> <tr><td>7</td><td>+</td><td>OUTPUT 2</td></tr> <tr><td>8</td><td>-</td><td>OUTPUT 2</td></tr> <tr><td>9</td><td>+</td><td>INPUT 1</td></tr> <tr><td>10</td><td>-</td><td>INPUT 1</td></tr> <tr><td>11</td><td>+</td><td>INPUT 2</td></tr> </table> <p>For Output 1, the pins of terminal nos. 7 & 8 are N.C.</p>	1	P (+)	POWER	2	N (-)	POWER	↓	GND		4	+	OUTPUT 1	5	-	OUTPUT 1	6	-	INPUT 2	7	+	OUTPUT 2	8	-	OUTPUT 2	9	+	INPUT 1	10	-	INPUT 1	11	+	INPUT 2	<table border="1"> <tr><td>1</td><td>N. C.</td><td></td></tr> <tr><td>2</td><td>N. C.</td><td></td></tr> <tr><td>↓</td><td>N. C.</td><td></td></tr> <tr><td>4</td><td>+</td><td>OUTPUT Ch 1</td></tr> <tr><td>5</td><td>-</td><td>OUTPUT Ch 1</td></tr> <tr><td>6</td><td>-</td><td>INPUT Ch 2</td></tr> <tr><td>7</td><td>+</td><td>OUTPUT Ch 2</td></tr> <tr><td>8</td><td>-</td><td>OUTPUT Ch 2</td></tr> <tr><td>9</td><td>+</td><td>INPUT Ch 1</td></tr> <tr><td>10</td><td>-</td><td>INPUT Ch 1</td></tr> <tr><td>11</td><td>+</td><td>INPUT Ch 2</td></tr> </table>	1	N. C.		2	N. C.		↓	N. C.		4	+	OUTPUT Ch 1	5	-	OUTPUT Ch 1	6	-	INPUT Ch 2	7	+	OUTPUT Ch 2	8	-	OUTPUT Ch 2	9	+	INPUT Ch 1	10	-	INPUT Ch 1	11	+	INPUT Ch 2	<table border="1"> <tr><td>1</td><td>P (+)</td><td>POWER</td></tr> <tr><td>2</td><td>N (-)</td><td>POWER</td></tr> <tr><td>↓</td><td>GND</td><td></td></tr> <tr><td>4</td><td>+</td><td>OUTPUT 1</td></tr> <tr><td>5</td><td>-</td><td>OUTPUT 1</td></tr> <tr><td>6</td><td>N. C.</td><td></td></tr> <tr><td>7</td><td>+</td><td>HOLD</td></tr> <tr><td>8</td><td>-</td><td>HOLD</td></tr> <tr><td>9</td><td>+</td><td>INPUT</td></tr> <tr><td>10</td><td>-</td><td>INPUT</td></tr> <tr><td>11</td><td>N. C.</td><td></td></tr> </table>	1	P (+)	POWER	2	N (-)	POWER	↓	GND		4	+	OUTPUT 1	5	-	OUTPUT 1	6	N. C.		7	+	HOLD	8	-	HOLD	9	+	INPUT	10	-	INPUT	11	N. C.		
1	P (+)	POWER																																																																																																				
2	N (-)	POWER																																																																																																				
↓	GND																																																																																																					
4	+	OUTPUT 1																																																																																																				
5	-	OUTPUT 1																																																																																																				
6	-	INPUT 2																																																																																																				
7	+	OUTPUT 2																																																																																																				
8	-	OUTPUT 2																																																																																																				
9	+	INPUT 1																																																																																																				
10	-	INPUT 1																																																																																																				
11	+	INPUT 2																																																																																																				
1	N. C.																																																																																																					
2	N. C.																																																																																																					
↓	N. C.																																																																																																					
4	+	OUTPUT Ch 1																																																																																																				
5	-	OUTPUT Ch 1																																																																																																				
6	-	INPUT Ch 2																																																																																																				
7	+	OUTPUT Ch 2																																																																																																				
8	-	OUTPUT Ch 2																																																																																																				
9	+	INPUT Ch 1																																																																																																				
10	-	INPUT Ch 1																																																																																																				
11	+	INPUT Ch 2																																																																																																				
1	P (+)	POWER																																																																																																				
2	N (-)	POWER																																																																																																				
↓	GND																																																																																																					
4	+	OUTPUT 1																																																																																																				
5	-	OUTPUT 1																																																																																																				
6	N. C.																																																																																																					
7	+	HOLD																																																																																																				
8	-	HOLD																																																																																																				
9	+	INPUT																																																																																																				
10	-	INPUT																																																																																																				
11	N. C.																																																																																																					


Thermocouple Temperature Converter



OVERVIEW

CE approved

Block Diagram & Terminal Wiring

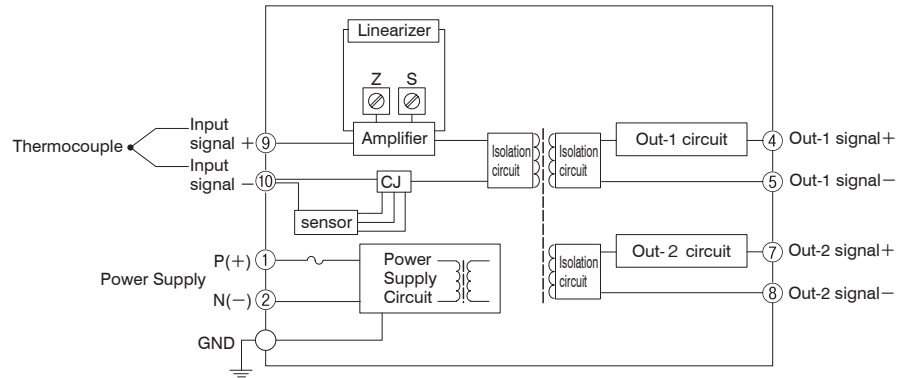

DESCRIPTION

The CP3701 is a slim, plug-in Thermocouple Temperature Converter that converts input signals from a thermocouple into commonly used DC signals and provides isolated single or dual output. .

SPECIFICATIONS

INPUT SECTION

- Input : Thermocouple / K, E, J, T, B, R, S, N (See measuring "ORDERING INFORMATION")
- Ranges Available : See measuring "MEASURING RANGE CODES"
- Input Resistance : With or without power: 1MΩ min.
- Reference junction temperature compensation : Built-in temperature compensator (temperature sensing element)
- Allowable Signal Source Resistance : 1kΩ max.
- Input Voltage : 30V DC max., continuous.

OUTPUT SECTION

- Allowable Output Load : Voltage Output (DC) / 1V span and up Load current: 2mA max.
10mV span and up Load resistance: 10kΩmin.
100mV span and up Load resistance: 100kΩmin.
- Conversion output variable range : Current Output (DC) / 4 to 20mA single output Load current: 750Ωmax.
4 to 20mA dual output Output 1: 550Ω max./Output 2: 350Ω max
- Burnout : Zero Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)
Span Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)
- Burnout : up-scale

STANDARDS CONFORMITY

- Conversion accuracy : Within ±0.1%FS ±0.5°C (sensing element accuracy) + linearization accuracy/at 25±5°C
Linearization accuracy will be changed by input span

	Input span	accuracy (%)
JIS K	0 to 300 °C	0.1
JIS J	0 to 200 °C	0.15
JIS E	0 to 600 °C	0.25
JIS S	0 to 1000 °C	0.25
JIS K	0 to 600 °C	0.15
JIS E	0 to 200 °C	0.15
JIS R	0 to 1600 °C	0.5
JIS T	0 to 300 °C	0.25

- Effecton against ambient temperature: : ±0.2% max. against span of 10°C temperature difference
- Response speed: : 160m sec. max. (0 to 90%) at 100% step input
- Isolation : 4-way isolation between input, output 1, output 2, and power.
- Insulation Resistance : Between input - [1st output, 2nd output] - [power supply, ground]: 2000V AC
Between power supply and ground: 2000V AC
Between output 1 and output 2: 500V AC

- Dielectric Strength : Input / [Output 1, Output 2] / [Power, Ground]: 2000V AC for 1 minute
Power / Ground: 2000V AC for 1 minute
Output 1 / Output 2: 500V AC for 1 minute
- Applicable standards : Safety IEC61010-1 and EN61010-1
EMC EN61326-1
RoHS directive supported

POWER SECTION

- Maximum power consumption

Power	2 Voltage Outputs	2 Current Outputs	Dual Output
AC100V	3VA max.	5VA max.	5VA max.
AC240V	4.5VA max.	7VA max.	7VA max.
DC24V	1.2W max.	1.8W max.	1.8W max.

MEASURING RANGE CODES

Input Type	Measuring Range	Code
E / J K / T	-100 to 100 °C	016
	-50 to 150 °C	035
	0 to 100 °C	219
	0 to 150 °C	223
	0 to 200 °C	226
	0 to 300 °C	230
	0 to 400 °C	240
	-200 to 200 °C	504
	-150 to 150 °C	507
E / J / K	-50 to 200 °C	533
	0 to 500 °C	250
K	0 to 600 °C	260
	0 to 800 °C	308
K / N / R	0 to 1000 °C	310
	0 to 1200 °C	312
N / R	0 to 1300 °C	313
	0 to 1400 °C	314
S / R	0 to 1600 °C	316
	0 to 1800 °C	318 *
Other		999

* Accuracy guarantee not applicable to 600 °C or below.

ORDERING INFORMATION

ITEMS	CODE	SPECIFICATIONS	
SERIES	CP3701-	Thermocouple Temperature Converter	
OUTPUT 1	1	0 to 10mV DC	
	2	0 to 100mV DC	
	3	-10 to 10mV DC	
	4	-100 to 100mV DC	
	5	1 to 5V DC	
	6	4 to 20mA DC	
	7	0 to 5V DC	
	8	0 to 10V DC	
	9	Others (Please consult before ordering.)	
OUTPUT 2	0	None	
	1	0 to 10mV DC	
	2	0 to 100mV DC	
	3	-10 to 10mV DC	
	4	-100 to 100mV DC	
	5	1 to 5V DC	
	6	4 to 20mA DC * Note: Available only when output 1 (4 to 20mA DC) is selected.	
	7	0 to 5V DC	
	8	0 to 10V DC	
9	Others (Please consult before ordering.)		
POWER SUPPLY	90-	100 to 240V AC ±10%, 50/60Hz	
	08-	24V DC ±10%	
INPUT	K	Thermocouple (K)	
	E	Thermocouple (E)	
	J	Thermocouple (J)	
	T	Thermocouple (T)	
	B	Thermocouple (B)	
	R	Thermocouple (R)	
	S	Thermocouple (S)	
	N	Thermocouple (N)	
	X	Others (Please consult before ordering.)	
MEASURING RANGE	□□□	See measuring range codes.	
REMARKS	0	Without	
	9	With (Please consult before ordering.)	


R.T.D. Temperature Converter



OVERVIEW

CE approved

Block Diagram & Terminal Wiring

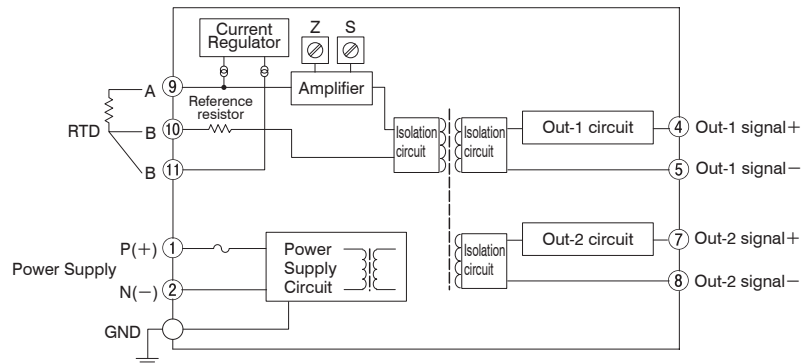

DESCRIPTION

The CP3702 is a slim, plug-in R.T.D. Temperature Converter that converts input signals from an RTD into commonly used DC signals and provides isolated single or dual output.

SPECIFICATIONS

INPUT SECTION

- Input : R.T.D. Pt100/JPt100 (See measuring "ORDERING INFORMATION")
- Ranges Available : See measuring "MEASURING RANGE CODES"
- Amperage : about 1mA
- Input lead wire resistance : 200Ωmax./wire

OUTPUT SECTION

- Allowable Output Load : Voltage Output (DC) / 1V span and up Load current: 2mA max.
10mV span and up Load resistance: 10kΩmin.
100mV span and up Load resistance: 100kΩmin.
- Current Output (DC) / 4 to 20mA single output Load current: 750Ωmax.
4 to 20mA dual output Output 1: 550Ω max./Output 2: 350Ω max
- Conversion output variable range : Zero Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)
Span Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)
- Burnout: : up-scale (Even if A, B, or B' is disconnected)

STANDARDS CONFORMITY

- Accuracy Rating : Better than ±0.15% of span (at 25°C±5°C).
- Temperature Effect : Better than ±0.2% of span per 10°C change in ambient.
- Response Time : 170ms max. (0 to 90%) with a step input at 100%.
- Isolation : 100MΩ min. (@ 500V DC) between input, output 1, output 2, power, and ground
- Insulation Resistance : Between input - [1st output, 2nd output] - [power supply, ground]: 2000V AC
Between power supply and ground: 2000V AC
Between output 1 and output 2: 500V AC
- Dielectric Strength : Input / [Output 1, Output 2] / [Power, Ground]: 2000V AC for 1 minute
Power / Ground: 2000V AC for 1 minute
Output 1 / Output 2: 500V AC for 1 minute
- Applicable standards : Safety IEC61010-1 and EN61010-1
EMC EN61326-1
RoHS directive supported

POWER SECTION

- Maximum power consumption :

Power	2 Voltage Outputs	2 Current Outputs	Dual Output
AC100V	3VA max.	5VA max.	5VA max.
AC240V	4.5VA max.	7VA max.	7VA max.
DC24V	1.2W max.	1.8W max.	1.8W max.

ORDERING INFORMATION

ITEMS	CODE	SPECIFICATIONS	
SERIES	CP3702-	R.T.D. Temperature Converter	
OUTPUT 1	1	0 to 10mV DC	
	2	0 to 100mV DC	
	3	-10 to 10mV DC	
	4	-100 to 100mV DC	
	5	1 to 5V DC	
	6	4 to 20mA DC	
	7	0 to 5V DC	
	8	0 to 10V DC	
	9	Others (Please consult before ordering.)	
OUTPUT 2	0	None	
	1	0 to 10mV DC	
	2	0 to 100mV DC	
	3	-10 to 10mV DC	
	4	-100 to 100mV DC	
	5	1 to 5V DC	
	6	4 to 20mA DC * Note: Available only when output 1 (4 to 20mA DC) is selected.	
	7	0 to 5V DC	
	8	0 to 10V DC	
9	Others (Please consult before ordering.)		
POWER SUPPLY	90-	100 to 240V AC $\pm 10\%$ 50/60Hz	
	08-	24V DC $\pm 10\%$	
INPUT	F	Pt100	
	J	JPt100	
MEASURING RANGE	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	See measuring range codes.	
REMARKS	0	Without	
	9	With (Please consult before ordering.)	

MEASURING RANGE CODES

Input Type	Measuring Range	Code
PT100 JPt100	-100 to 100 °C	016
	-100 to 50 °C	018
	-100 to 0 °C	020
	-60 to 40 °C	029
	-50 to 150 °C	035
	-50 to 100 °C	036
	-50 to 50 °C	038
	-20 to 80 °C	053
	-10 to 50 °C	063
	0 to 50 °C	211
	0 to 60 °C	213
	0 to 100 °C	219
	0 to 150 °C	223
	0 to 200 °C	226
	0 to 250 °C	228
	0 to 300 °C	230
	0 to 350 °C	235
	0 to 400 °C	240
	Other	999


mV DC-DC Converter



OVERVIEW

CE approved

Block Diagram & Terminal Wiring

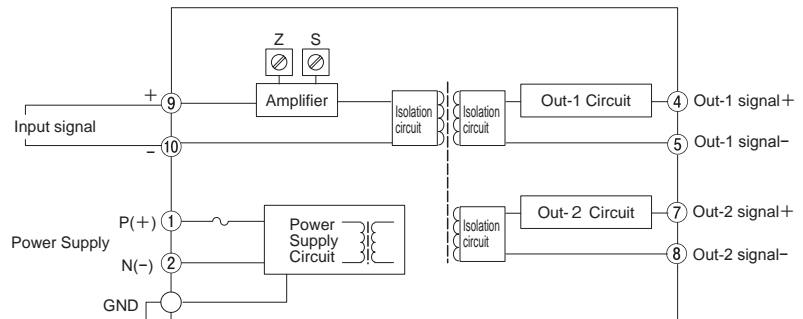

* If any inductive load like an electric motor was connected, a relay contact protection circuit must be used.

DESCRIPTION

The CP3703 is a slim, plug-in mV DC-DC Converter that converts mV input signals from sensors or other devices into commonly used DC signals and provides isolated single or dual output.

SPECIFICATIONS

INPUT SECTION

- Input : DC voltage signal mV (see "ORDERING INFORMATION")
- Input resistance: : 1MΩmin. (1MΩ when power failure/constant input)
- Input tolerable voltage : 30V DC Max. continuous

OUTPUT SECTION

- Allowable Output Load : Voltage Output (DC) / 1V span and up Load current: 2mA max.
10mV span and up Load resistance: 10kΩmin.
100mV span and up Load resistance: 100kΩmin.
- Conversion output variable range : Current Output (DC) / 4 to 20mA single output Load current: 750Ωmax.
4 to 20mA dual output Output 1: 550Ω max./Output 2: 350Ω max
- Conversion output variable range : Zero Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)
- Span Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)

STANDARDS CONFORMITY

- Accuracy Rating : Better than ±0.1% of span (at 25°C±5°C).
- Temperature Effect : Better than ±0.2% of span per 10°C change in ambient.
- Conversion output : DC voltage, current (see "ORDERING INFORMATION")
- Response Time : 160ms max. (0 to 90%) with a step input at 100%.
- Isolation : 4-way isolation between input, output 1, output 2, and power.
- Insulation Resistance : Between input - [1st output, 2nd output] - [power supply, ground]: 2000V AC
Between power supply and ground: 2000V AC
Between output 1 and output 2: 500V AC
- Applicable standards : Safety IEC61010-1 and EN61010-1
EMC EN61326-1
RoHS directive supported

POWER SECTION

• Maximum power consumption	:	Power	2 Voltage Outputs	2 Current Outputs	Dual Output
		AC100V	2.5VA max.	4VA max.	4VA max.
		AC240V	3.5VA max.	5VA max.	5VA max.
		DC24V	1.1W max.	1.6W max.	1.6W max.

ORDERING INFORMATION

ITEMS	CODE	SPECIFICATIONS	
SERIES	CP3703-	mV DC-DC Converter	
INPUT	1	0 to 10mV DC	
	2	0 to 100mV DC	
	9	Others (Please consult before ordering.)	
OUTPUT 1	1	0 to 10mV DC	
	2	0 to 100mV DC	
	3	-10 to 10mV DC	
	4	-100 to 100mV DC	
	5	1 to 5V DC	
	6	4 to 20mA DC	
	7	0 to 5V DC	
	8	0 to 10V DC	
	9	Others (Please consult before ordering.)	
OUTPUT 2	0	None	
	1	0 to 10mV DC	
	2	0 to 100mV DC	
	3	-10 to 10mV DC	
	4	-100 to 100mV DC	
	5	1 to 5V DC	
	6	4 to 20mA DC	* Note: Available only when output 1 (4 to 20mA DC) is selected.
	7	0 to 5V DC	
	8	0 to 10V DC	
9	Others (Please consult before ordering.)		
POWER SUPPLY	90-	100 to 240V AC	±10% 50/60Hz
	08-	24V DC	±10%
REMARKS	0	Without	
	9	With (Please consult before ordering.)	


V/mA DC-DC Converter



OVERVIEW

CE approved

Block Diagram & Terminal Wiring

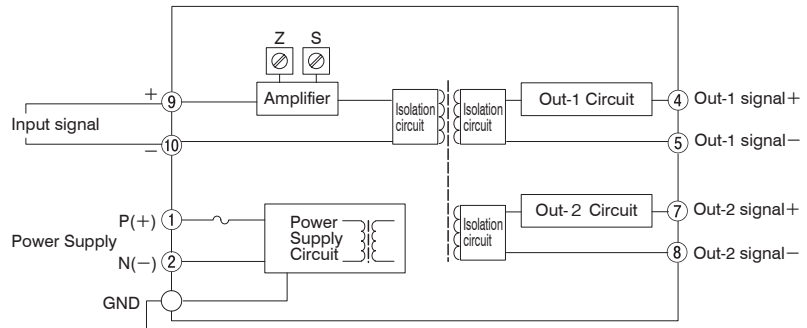

* If any inductive load like an electric motor was connected, a relay contact protection circuit must be used.

DESCRIPTION

This Slim-shaped Plug-in V/mA DC-DC Converter, CP3704 functions to convert DC signal or VDC signal into any designated DC signals to generate isolated single or dual output.

SPECIFICATIONS

INPUT SECTION

- Input : DC current or mA signal (see "ORDERING INFORMATION")
- Input resistance: : Voltage input: 1MΩmin. (1MΩ when power failure/constant input)
Current input: 250Ω
- Input tolerable range : Voltage input: 30V DC
Current input: 40mA DC

OUTPUT SECTION

- Allowable Output Load : Voltage Output (DC) / 1V span and up Load current: 2mA max.
10mV span and up Load resistance: 10kΩmin.
100mV span and up Load resistance: 100kΩmin.
- Conversion output variable range : Current Output (DC) / 4 to 20mA single output Load current: 750Ωmax.
4 to 20mA dual output Output 1: 550Ω max./Output 2: 350Ω max
- Conversion output variable range : Zero Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)
Span Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)

STANDARDS CONFORMITY

- Conversion accuracy : Within ±0.1% at 25±5 °C
- Conversion output : DC voltage, current (see "ORDERING INFORMATION")
- Temperature Effect : Better than ±0.2% of span per 10°C change in ambient.
- Response Time : 85ms max. (0 to 90%) with a step input at 100%.
- Isolation : 4-way isolation between input, output 1, output 2, and power.
- Insulation Resistance : 100MΩ min. (@ 500V DC) between input, output 1, output 2, power, and ground.
- Dielectric Strength : Input / [Output 1, Output 2] / [Power, Ground]: 2000V AC for 1 minute
Power / Ground: 2000V AC for 1 minute
Output 1 / Output 2: 500V AC for 1 minute
- Applicable standards : Safety IEC61010-1 and EN61010-1
EMC EN61326-1
RoHS directive supported

POWER SECTION

- Maximum power consumption :

Power	2 Voltage Outputs	2 Current Outputs	Dual Output
AC100V	2.5VA max.	4VA max.	4VA max.
AC240V	3.5VA max.	5VA max.	5VA max.
DC24V	1.0W max.	1.5W max.	1.6W max.

ORDERING INFORMATION

ITEMS	CODE	SPECIFICATIONS	
SERIES	CP3704-	V/mA DC-DC Converter	
INPUT	1	0 to 5V DC	
	3	0 to 1V DC	
	4	0 to 10V DC	
	5	1 to 5V DC	
	6	4 to 20mA DC	
	7	-5 to 5V DC	
	8	-10 to 10V DC	
	9	Others (Please consult before ordering.)	
	OUTPUT 1	1	0 to 10mV DC
2		0 to 100mV DC	
3		-10 to 10mV DC	
4		-100 to 100mV DC	
5		1 to 5V DC	
6		4 to 20mA DC	
7		0 to 5V DC	
8		0 to 10V DC	
9		Others (Please consult before ordering.)	
OUTPUT 2	0	None	
	1	0 to 10mV DC	
	2	0 to 100mV DC	
	3	-10 to 10mV DC	
	4	-100 to 100mV DC	
	5	1 to 5V DC	
	6	4 to 20mA DC	* Note: Available only when output 1 (4 to 20mA DC) is selected.
	7	0 to 5V DC	
	8	0 to 10V DC	
9	Others (Please consult before ordering.)		
POWER SUPPLY	90-	100 to 240V AC	±10% 50/60Hz
	08-	24V DC	±10%
REMARKS	0	Without	
	9	With (Please consult before ordering.)	


Alarm Setter (Dual Points)



OVERVIEW



CE approved

Block Diagram & Terminal Wiring

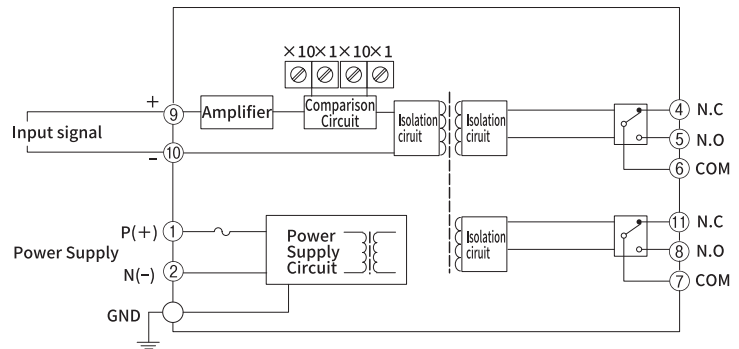

* If any inductive load like an electric motor was connected, a relay contact protection circuit must be used.

- Example of AC power supply connection
- Example of DC power supply connection

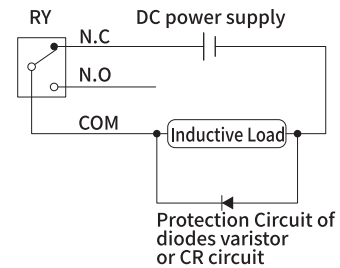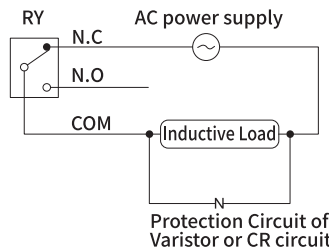

DESCRIPTION

This Slim-shaped Plug-in Isolated Alarm Setter (Dual Points), CP3705 functions to generate two independent relay contact ON/OFF outputs by comparing high level DC input signal with two pre-set trip points (higher and lower limits).

SPECIFICATIONS

INPUT SECTION

- Input : DC voltage or DC current (see "ORDERING INFORMATION")
- Input resistance : Voltage input: 1MΩmin. (1MΩ when power failure/constant input)
Current input: 250Ω
- Input tolerable range : Voltage input: 30V DC
Current input: 40mA DC

OUTPUT SECTION

- Output Signal : Two independent form C relay contact closure signals
- Alarm action method: : High/Low Limit, High/High Limit, Low/Low Limit (see "ORDERING INFORMATION")
- Alarm setting method: : By front rotary switch
- Alarm setting range: : 0 to 99% of input signal (adjustable in steps of 1%).
- Alarm setting resolution : 1%FS
- Alarm setting accuracy : ±0.5%FS
- Conversion accuracy: : Within ±0.1% at 25±5 °C
- Hysteresis : 1.0%±0.3% of span
- Relay Indicator : The red LED lights up when the relay is activated.
- Relay Activation without Power : COM and NC are closed for each output.
- Relay Start-up Limitation : The relay gets ready for action about 2 seconds after power-up.

■ **STANDARDS CONFORMITY**

- Temperature Effect : Better than $\pm 0.2\%$ of span per 10°C change in ambient.
- Conversion accuracy : Within $\pm 0.1\%$ at 25 ± 5 °C
- Temperature Effect : Better than $\pm 0.2\%$ of span per 10°C change in ambient.
- Input response speed: : 150m sec. max. (0 to 90%) at 100% step input
- Isolation : Isolation between input, output 1, output 2, and power.
- Insulation Resistance : 100M Ω min. (@ 500V DC) between input, output 1, output 2, power, and ground.
- Dielectric Strength : Input / Output 1 / Output 2 / [Power, Ground]: 2000V AC for 1 minute
Power / Ground: 2000V AC for 1 minute
- Applicable standards : Safety IEC61010-1 and EN61010-1
EMC EN61326-1
RoHS directive supported
- Relay Contacts
 - Rated Load : 5A 125V AC, 5A 30V DC
 - Maximum Allowable Voltage : 250V AC, 30V DC
 - Allowable Voltage Maximum : 5A (NO) / 3A (NC)
 - Allowable Current Electrical Life : 5A, 250V AC (NO): 50 × 10³ cycles (Frequency: 1,800 cycles/h)
5A, 30V DC (NO): 100 × 10³ cycles (Frequency: 1,800 cycles/h)
 - Mechanical Life : 5 × 10⁶ cycles (Frequency: 18,000 cycles/h)

■ **POWER SECTION**

- Maximum power consumption : AC100V 4.5VA max.
AC240V 6.5VA max.
DC24V 2.0W max.

ORDERING INFORMATION

ITEMS	CODE	SPECIFICATIONS	
SERIES	CP3705-	Alarm Setter (Dual Points)	
INPUT	1	0 to 5V DC	
	4	0 to 10V DC	
	5	1 to 5V DC	
	6	4 to 20mA DC	
	9	Others (Please consult before ordering.)	
ALARM ACTION	03	High/Low Limit Alarm	
	07	Low/Low Limit Alarm	
	08	High/High Limit Alarm	
POWER SUPPLY	90-	100 to 240V AC $\pm 10\%$ 50/60Hz	
	08-	24V DC $\pm 10\%$	
REMARKS	0	Without	
	9	With (Please consult before ordering.)	




Distributor (with Isolation)



CE approved

OVERVIEW

Block Diagram & Terminal Wiring

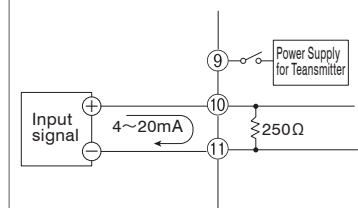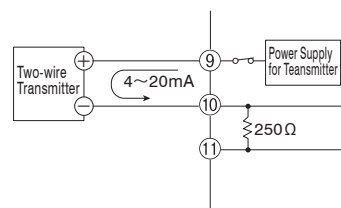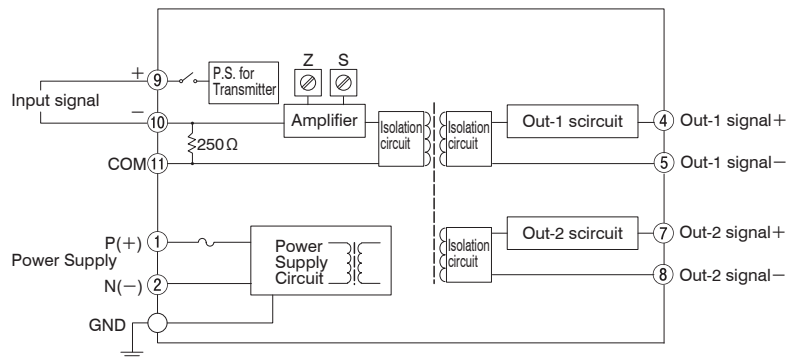

DESCRIPTION

This Slim-shaped Plug-in type Distributor, CP3707 functions to supply power to various types of Two-wire Transmitter and convert 4 to 20mA signal therefrom into any desired DC signal. It can also be used as an isolation device (isolator).

SPECIFICATIONS

INPUT SECTION

- Input Signal : 4 to 20mA DC from 2-wire transmitters
- Input resistance : 250Ω
- Power supply to transmitter : Output voltage: 28.4V (typical)/at 0% input to 21.6V (typical)/at 100% input
: Max. current: 22mA (typical)
- Limiting Current for Short-Circuit Protection : 40mA max.
- Permissible Short-Circuit Duration : Continuous.

OUTPUT SECTION

- Allowable Output Load : Voltage Output (DC) / 1V span and up Load current: 2mA max.
10mV span and up Load resistance: 10kΩmin.
100mV span and up Load resistance: 100kΩmin.
- Current Output (DC) / 4 to 20mA single output Load current: 750Ωmax.
4 to 20mA dual output Output 1: 550Ω max./Output 2: 350Ω max
- Conversion output variable range : Zero Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)
: Span Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)

STANDARDS CONFORMITY

- Conversion accuracy : Within ±0.1% at 25±5 °C
- Conversion output : DC voltage, current (see "ORDERING INFORMATION")
- Temperature Effect : Better than ±0.2% of span per 10°C change in ambient.
- Response Time : 85ms max. (0 to 90%) with a step input at 100%.
- Isolation : 4-way isolation between input, output 1, output 2, and power.
- Insulation Resistance : 100MΩ min. (@ 500V DC) between input, output 1, output 2, power, and ground.
- Dielectric Strength : Input / [Output 1, Output 2] / [Power, Ground]: 2000V AC for 1 minute (Cutoff current: 0.5mA)
Power / Ground: 2000V AC for 1 minute
Output 1 / Output 2: 500V AC for 1 minute
- Applicable standards : Safety IEC61010-1 and EN61010-1
EMC EN61326-1
RoHS directive supported

■ **POWER SECTION**

- Maximum power consumption

Power	2 Voltage Outputs	2 Current Outputs	Dual Output
AC100V	4VA max.	5.5VA max.	5.5VA max.
AC240V	5.5VA max.	7.5VA max.	7.5VA max.
DC24V	1.8W max.	2.3W max.	2.4W max.

ORDERING INFORMATION


ITEMS	CODE	SPECIFICATIONS	
SERIES	CP3707-	Distributor (with Isolation)	
OUTPUT 1	1	0 to 10mV DC	
	2	0 to 100mV DC	
	3	-10 to 10mV DC	
	4	-100 to 100mV DC	
	5	1 to 5V DC	
	6	4 to 20mA DC	
	7	0 to 5V DC	
	8	0 to 10V DC	
	9	Others (Please consult before ordering.)	
OUTPUT 2	0	None	
	1	0 to 10mV DC	
	2	0 to 100mV DC	
	3	- 10 to 10mV DC	
	4	- 100 to 100mV DC	
	5	1 to 5V DC	
	6	4 to 20mA DC * Note: Available only when output 1 (4 to 20mA DC) is selected.	
	7	0 to 5V DC	
	8	0 to 10V DC	
9	Others (Please consult before ordering.)		
POWER SUPPLY	90-	100 to 240V AC ±10% 50/60Hz	
	08-	24V DC ±10%	
REMARKS	0	Without	
	9	With (Please consult before ordering.)	

Frequency/DC Converter




OVERVIEW


Block Diagram & Terminal Wiring

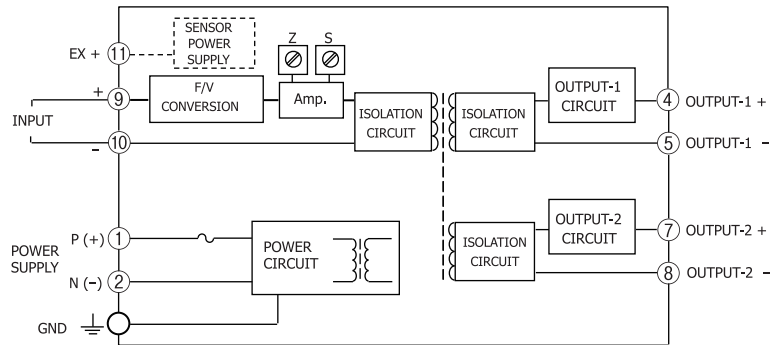


For dry contact or open collector input:

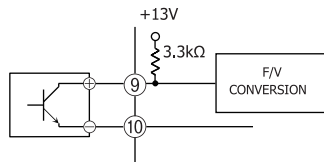

For voltage pulse input:

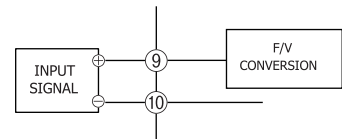

When a 2-wire sensor is used:

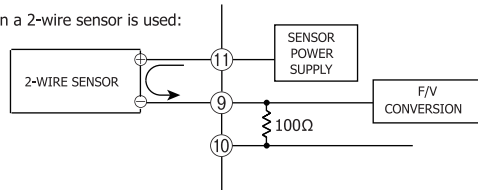

Note: The connections may vary depending on the type of the sensor used.

DESCRIPTION

The CP3708 is a slim, plug-in Frequency/DC Converter that converts pulse train signals from flow sensors and the like into commonly used DC signals and provides isolated single or dual output.

SPECIFICATIONS

INPUT SECTION

- Input resistance : Voltage input 1 MΩ or more (30 kΩ or more at power failure)
- Allowable input voltage : 30V DC max. continuous
- Input pulse width : 4 μs or more
- Duty Ratio : 40 to 60%

OUTPUT SECTION

- Allowable Output Load : Voltage Output (DC) / 1V span and up Load current: 2mA max.
10mV span and up Load resistance: 10kΩmin.
100mV span and up Load resistance: 100kΩmin.
- Current Output (DC) / 4 to 20mA single output Load current: 750Ωmax.
4 to 20mA dual output Output 1: 550Ω max./Output 2: 350Ω max
- Conversion output variable range : Zero Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)
Span Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)

STANDARDS CONFORMITY

- Conversion accuracy : Within ±0.3% at 25±5 °C
- Temperature Effect : Better than ±0.2% of span per 10°C change in ambient.
- Response Time : Input Frequency 0 to 90% with a step input at 100%
200 Hz 1 second max.
2 kHz max. 500 ms max.
- Isolation : 4-way isolation between input, output 1, output 2, and power.

- Insulation Resistance : 100MΩ min. (@ 500V DC) between input, output 1, output 2, power, and ground.
- Dielectric Strength : Input / [Output 1, Output 2] / [Power, Ground]: 2000V AC for 1 minute
Power / Ground: 2000V AC for 1 minute
Output 1 / Output 2: 500V AC for 1 minute
- Applicable standards : RoHS directive supported

■ **POWER SECTION**

● Maximum power consumption :	Power	100 to 240V AC	24V DC
	1 output type	8.3VA max.	2.6W max.
	2 output type	9.0VA max.	3.0W max.

ORDERING INFORMATION

ITEMS	Code	SPECIFICATIONS	
SERIES	CP3708-	Frequency/DC Converter	
INPUT	1	Non-voltage contact, open collector (detection power supply approx. 13V)	
	2	DC voltage pulse (threshold voltage approx. 2V)	
	9	Others (Please consult before ordering.)	
MEASURING RANGE	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	Select from the MEASUREMENT RANGE CODE selection table below	
OUTPUT 1	1	0 to 10mV DC	
	2	0 to 100mV DC	
	3	0 to 1V DC	
	4	0 to 10V DC	
	5	0 to 5V DC	
	6	1 to 5V DC	
	7	4 to 20mA DC	
	9	Others (Please consult before ordering.)	
	OUTPUT 2	0	None
1		0 to 10mV DC	
2		0 to 100mV DC	
3		0 to 1V DC	
4		0 to 10V DC	
5		0 to 5V DC	
6		1 to 5V DC	
7		4 to 20mA DC * Note: Available only when output 1 (4 to 20mA DC) is selected.	
9		Others (Please consult before ordering.)	
Power Supply	90 -	100 to 240V AC	
	08 -	24V DC	
REMARKS	0	Without	
	9	With (Please consult before ordering.)	

MEASURING RANGE CODES

Measuring Range	Code
0 to 200Hz	726
0 to 500Hz	750
0 to 1000Hz	810
0 to 2000Hz	820
0 to 5000Hz	841


Potentiometer Converter



OVERVIEW

CE approved

Block Diagram & Terminal Wiring

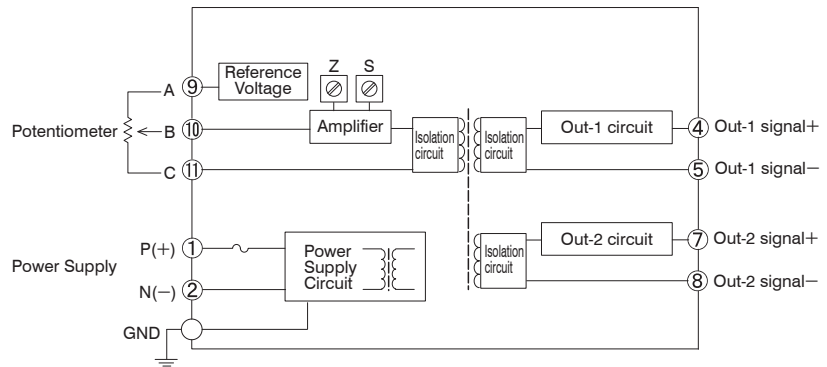

DESCRIPTION

This Slim-shaped Plug-in type Potentiometer Converter, CP3710 functions to detect the variation of resistance value of Potentiometer (slide rheostat) type sensor and convert same into any desired isolated No.1 and No. 2 (dual) DC output.

SPECIFICATIONS

INPUT SECTION

- Input : Potentiometer (3 wire system)
- Input resistance range : Within 0 to 100Ω and 0 to 10kΩ
- Allowable input lead wire resistance : 10% (per wire) FS max. of total resistance. (Resistance of each wire should be identical)

OUTPUT SECTION

- Allowable Output Load : Voltage Output (DC) / 1V span and up Load current: 2mA max.
10mV span and up Load resistance: 10kΩmin.
100mV span and up Load resistance: 100kΩmin.
- Current Output (DC) / 4 to 20mA single output Load current: 750Ωmax.
4 to 20mA dual output Output 1: 550Ω max./Output 2: 350Ω max
- Conversion output : DC voltage, current (see "ORDERING INFORMATION")
- Conversion output variable range : Zero Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)
Span Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)

STANDARDS CONFORMITY

- Conversion accuracy: : Within ±0.2% at 25±5 °C
- Temperature Effect : Better than ±0.2% of span per 10°C change in ambient.
- Response Time : 170ms max. (0 to 90%) with a step input at 100%
- Isolation : 4-way isolation between input, output 1, output 2, and power.
- Insulation Resistance : 100MΩ min. (@ 500V DC) between input, output 1, output 2, power, and ground.
- Dielectric Strength : Input / [Output 1, Output 2] / [Power, Ground]: 2000V AC for 1 minute.
Power / Ground: 2000V AC for 1 minute
Output 1 / Output 2: 500V AC for 1 minute
- Applicable standards : Safety IEC61010-1 and EN61010-1
EMC EN61326-1
RoHS directive supported

POWER SECTION

• Maximum power consumption	:	Power	2 Voltage Outputs	2 Current Outputs	Dual Output
		AC100V	3VA max.	4VA max.	45VA max.
		AC240V	4.5VA max.	5.5VA max.	5.5VA max.
		DC24V	1.0W max.	1.4W max.	1.5W max.

ORDERING INFORMATION


ITEMS	CODE	SPECIFICATIONS	
SERIES	CP3710-	Potentiometer Converter	
OUTPUT 1	1	0 to 10mV DC	
	2	0 to 100mV DC	
	3	-10 to 10mV DC	
	4	-100 to 100mV DC	
	5	1 to 5V DC	
	6	4 to 20mA DC	
	7	0 to 5V DC	
	8	0 to 10V DC	
	9	Others (Please consult before ordering.)	
OUTPUT 2	0	None	
	1	0 to 10mV DC	
	2	0 to 100mV DC	
	3	-10 to 10mV DC	
	4	-100 to 100mV DC	
	5	1 to 5V DC	
	6	4 to 20mA DC * Note: Available only when output 1 (4 to 20mA DC) is selected.	
	7	0 to 5V DC	
	8	0 to 10V DC	
9	Others (Please consult before ordering.)		
POWER SUPPLY	90-	100 to 240V AC \pm 10% 50/60Hz	
	08-	24V DC \pm 10%	
REMARKS	0	Without	
	9	With (Please consult before ordering.)	

Square-Root Extractor



OVERVIEW

Block Diagram & Terminal Wiring

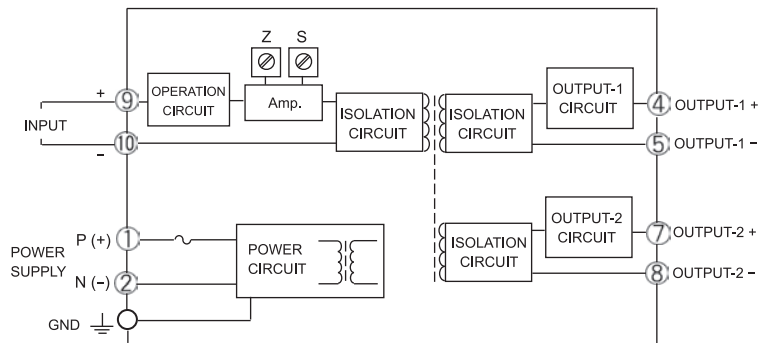

DESCRIPTION

The CP3713 is a slim, plug-in Square-Root Extractor that extracts the square roots of DC current or voltage signals, converts them into commonly used DC signals and provides isolated single or dual output.

SPECIFICATIONS

INPUT SECTION

- Input Resistance
 - Voltage Input (DC) : With or without power: 1MΩ min.
 - Current Input (DC) : 250Ω
- Allowable Input Voltage
 - Voltage Input Mode : 30V DC max., continuous. (Standard for a span up to 10V)
 - Current Input Model : 40mA DC max., continuous. (Standard for 4 to 20mA)

OUTPUT SECTION

- Allowable Output Load
 - : Voltage Output (DC) / 1V span and up Load current: 2mA max.
 - 10mV span and up Load resistance: 10kΩmin.
 - 100mV span and up Load resistance: 100kΩmin.
 - : Current Output (DC) / 4 to 20mA single output Load current: 750μmax.
 - 4 to 20mA dual output Output 1: 550Ω max./Output 2: 350Ω max
- Conversion output variable range
 - : Zero Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)
 - : Span Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)

Square-Root Extraction

: $X = 10\sqrt{Y}$
 where
 X = Output signal (0 to 100%)
 Y = Input signal (0 to 100%)

Note: The cutoff function works when the output reaches 8%±1%.

STANDARDS CONFORMITY

- Conversion accuracy: : Within ±0.2% at 25±5 °C
- Temperature Effect : Better than ±0.2% of span per 10°C change in ambient.
- Response Time : 120ms max.
- Isolation : 4-way isolation between input, output 1, output 2, and power.
- Insulation Resistance : 100MΩ min. (@ 500V DC) between input, output 1, output 2, power, and ground.
- Dielectric Strength : Input / [Output 1, Output 2] / [Power, Ground]: 2000V AC for 1 minute.
 Power / Ground: 2000V AC for 1 minute
 Output 1 / Output 2: 500V AC for 1 minute
- Applicable standards : RoHS directive supported

■ **POWER SECTION**

- Maximum power consumption :

Power	AC100 to 240V	DC24V
1 output type	5.5VA max	1.6W max
2 output type	6.0VA max	2.0W max

ORDERING INFORMATION

ITEMS	CODE	SPECIFICATIONS
SERIES	CP3713-	Square-Root Extractor
Input	3	0 to 1V DC
	4	0 to 10V DC
	5	0 to 5V DC
	6	1 to 5V DC
	7	4 to 20mA DC
	9	Others (Please consult before ordering.)
OUTPUT 1	1	0 to 10mV DC
	2	0 to 100mV DC
	3	0 to 1V DC
	4	0 to 10V DC
	5	0 to 5V DC
	6	1 to 5V DC
	7	4 to 20mA DC
	9	Others (Please consult before ordering.)
	OUTPUT 2	0
1		0 to 10mV DC
2		0 to 100mV DC
3		0 to 1V DC
4		0 to 10V DC
5		0 to 5V DC
6		1 to 5V DC
7		4 to 20mA DC * Note: Available only when output 1 (4 to 20mA DC) is selected.
9		Others (Please consult before ordering.)
Power Supply	90-	100 to 240V AC
	08-	24V DC
REMARKS	0	Without
	9	With (Please consult before ordering.)

$OUT1 \cdot 2 (\%) = 10 \times \sqrt{IN} (\%)$

Operates at 8% max. low cut of conversion output.


Limiter



OVERVIEW



Block Diagram & Terminal Wiring

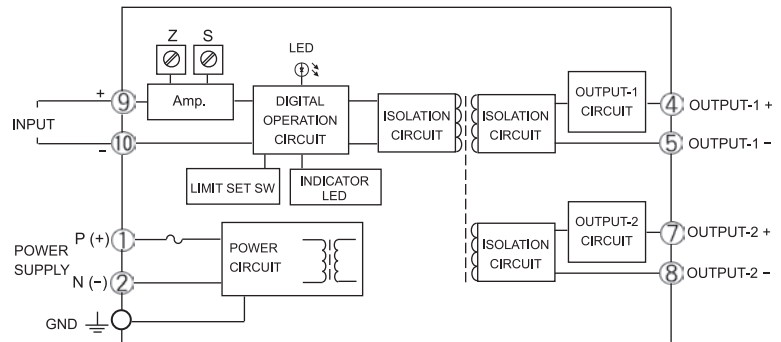

DESCRIPTION

The CP3714 is a slim, plug-in Limiter that converts DC current or voltage signals into commonly used DC signals, limits the outputs to force them to fall within the range between user-defined upper and lower limits, and provides isolated single or dual output.

SPECIFICATIONS

INPUT SECTION

- Calculation method : $OUT (\%) = IN (\%)$
Signal limit -10 to 105% for both upper and lower limits (0.1% step, 1% step for 100% or more)
- Input Resistance
 - Voltage Input (DC) : With or without power: 1MΩ min.
 - Current Input (DC) : 250Ω
- Allowable Input Voltage
 - Voltage Input Mode : 30V DC max., continuous. (Standard for a span up to 10V)
 - Current Input Model : 40mA DC max., continuous. (Standard for 4 to 20mA)

OUTPUT SECTION

- Allowable Output Load
 - Voltage Output (DC) / 1V span and up Load current: 2mA max.
 - 10mV span and up Load resistance: 10kΩmin.
 - 100mV span and up Load resistance: 100kΩmin.
 - Current Output (DC) / 4 to 20mA single output Load current: 750Ωmax.
 - 4 to 20mA dual output Output 1: 550Ω max./Output 2: 350Ω max
- Conversion output variable range
 - : Zero Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)
 - : Span Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)
- Limit Setting Range : -10 to 105% for both upper and lower limits (in steps of 0.1%; but 1% for the range over 100%).

STANDARDS CONFORMITY

- Conversion accuracy: : Within ±0.2% at 25±5 °C
- Limit setting accuracy : Within ±0.2% at 25±5 °C
- Temperature Effect : Better than ±0.15% of span per 10°C change in ambient.
- Response Time : 85ms max. (0 to 90%) with a step input at 100%.
- Limit Value Indicator : Red LED, digit height 8.0mm, 3 digits.
- Isolation : 4-way isolation between input, output 1, output 2, and power.
- Insulation Resistance : 100MΩ min. (@ 500V DC) between input, output 1, output 2, power, and ground.
- Dielectric Strength : Input / [Output 1, Output 2] / [Power, Ground]: 2000V AC for 1 minute.
Power / Ground: 2000V AC for 1 minute
Output 1 / Output 2: 500V AC for 1 minute

- Applicable standards : Safety IEC61010-1 and EN61010-1
EMC EN61326-1
RoHS directive supported

■ **POWER SECTION**


- Maximum power consumption :

Power	AC100 to 240V	DC24V
1 output type	6.0VA max	1.7W max
2 output type	6.5VA max	2.1W max

ORDERING INFORMATION

ITEMS	CODE	SPECIFICATIONS
SERIES	CP3714 -	Limiter
INPUT	3	0 to 1V DC
	4	0 to 10V DC
	5	0 to 5V DC
	6	1 to 5V DC
	7	4 to 20mA DC
	9	Others (Please consult before ordering.)
OUTPUT 1	1	0 to 10mV DC
	2	0 to 100mV DC
	3	0 to 1V DC
	4	0 to 10V DC
	5	0 to 5V DC
	6	1 to 5V DC
	7	4 to 20mA DC
	9	Others (Please consult before ordering.)
	OUTPUT 2	0
1		0 to 10mV DC
2		0 to 100mV DC
3		0 to 1V DC
4		0 to 10V DC
5		0 to 5V DC
6		1 to 5V DC
7		4 to 20mA DC * Note: Available only when output 1 (4 to 20mA DC) is selected.
9		Others (Please consult before ordering.)
POWER SUPPLY	90 -	100 to 240V AC
	08 -	24V DC
REMARKS	0	Without
	9	With (Please consult before ordering.)

FRONT VIEW

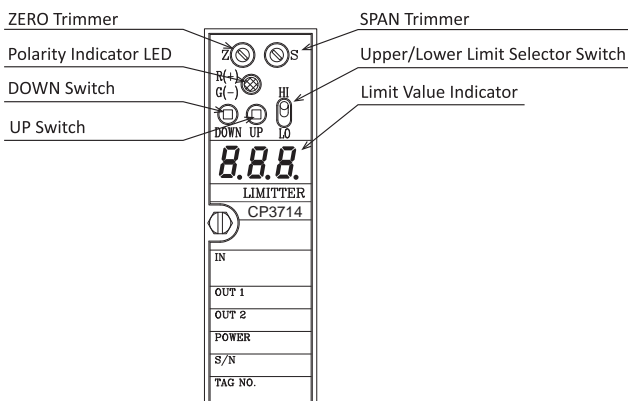


Change-rate Limiting Converter



OVERVIEW

Block Diagram & Terminal Wiring

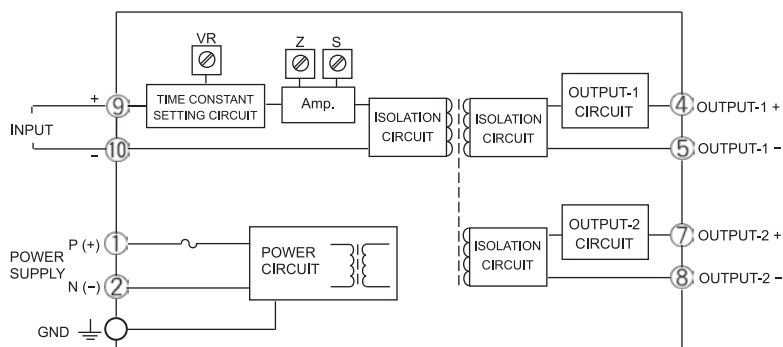

DESCRIPTION

The CP3716 is a slim, plug-in Change-rate Limiting Converter that adds a first-order delay to DC current or voltage input signals, converts them into commonly used DC signals, and provides isolated single or dual output.

SPECIFICATIONS

INPUT SECTION

- Input Resistance
 - Voltage Input (DC) : With or without power: 1MΩ min.
 - Current Input (DC) : 250Ω
- Allowable Input Voltage
 - Voltage Input Mode : 30V DC max., continuous. (Standard for a span up to 10V)
 - Current Input Model : 40mA DC max., continuous. (Standard for 4 to 20mA)
- Time Constant Setting Range : A time constant setting range should be specified between 0.2 and 20 seconds.
- Time Constant Setting Trimmer : Rotation of up to 260°

OUTPUT SECTION

- Allowable Output Load
 - Voltage Output (DC) / 1V span and up Load current: 2mA max.
 - 10mV span and up Load resistance: 10kΩmin.
 - 100mV span and up Load resistance: 100kΩmin.
 - Current Output (DC) / 4 to 20mA single output Load current: 750Ωmax.
 - 4 to 20mA dual output Output 1: 550Ω max./Output 2: 350Ω max
- Conversion output variable range
 - : Zero Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)
 - : Span Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)

STANDARDS CONFORMITY

- Conversion accuracy: : Within ±0.1% at 25±5 °C
- Temperature Effect : Better than ±0.2% of span per 10°C change in ambient.
- Isolation : 4-way isolation between input, output 1, output 2, and power.
- Insulation Resistance : 100MΩ min. (@ 500V DC) between input, output 1, output 2, power, and ground.
- Dielectric Strength : Input / [Output 1, Output 2] / [Power, Ground]: 2000V AC for 1 minute.
Power / Ground: 2000V AC for 1 minute
Output 1 / Output 2: 500V AC for 1 minute
- Applicable standards : RoHS directive supported

POWER SECTION

- Maximum power consumption :

	Power	AC100 to 240V	DC24V
1 output type		5.0VA max	1.4W max
2 output type		6.0VA max	1.8W max

ORDERING INFORMATION

ITEMS	CODE	SPECIFICATIONS	
SERIES	CP3716 -	Change-rate Limiting Converter	
INPUT	3	0 to	1V DC
	4	0 to	10V DC
	5	0 to	5V DC
	6	1 to	5V DC
	7	4 to	20mA DC
	9	Others (Please consult before ordering.)	
OUTPUT 1	1	0 to	10mV DC
	2	0 to	100mV DC
	3	0 to	1V DC
	4	0 to	10V DC
	5	0 to	5V DC
	6	1 to	5V DC
	7	4 to	20mA DC
	9	Others (Please consult before ordering.)	
OUTPUT 2	0	None	
	1	0 to	10mV DC
	2	0 to	100mV DC
	3	0 to	1V DC
	4	0 to	10V DC
	5	0 to	5V DC
	6	1 to	5V DC
	7	4 to	20mA DC
9	Others (Please consult before ordering.)		
POWER SUPPLY	90 -	100 to 240V AC	
	08 -	24V DC	
REMARKS	0	Without	
	9	With (Please consult before ordering.)	


CT Transmitter (Rms Calculation)



OVERVIEW



Block Diagram & Terminal Wiring

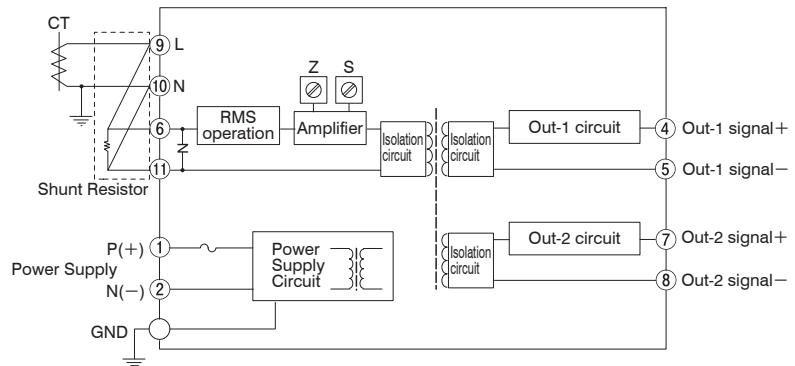

DESCRIPTION

CP3720 performs conditioning of AC current signal from CT to output the corresponding DC signals.

SPECIFICATIONS

INPUT SECTION

- Input : AC current by CT output (see "ORDERING INFORMATION")
- Input Resistance : 5A AC input: 2mΩ (Shunt resistor)
1A AC input: 10mΩ (Shunt resistor)
- Input Frequency : 50/60 Hz
- Allowable Input Current : Continuous: 120% of the rated input value
Instantaneous: 10 times the rated input value (within 3 seconds)
- Crest factor : 3 max.

OUTPUT SECTION

- Allowable Output Load : Voltage Output (DC) / 1V span and up Load current: 2mA max.
10mV span and up Load resistance: 10kΩmin.
100mV span and up Load resistance: 100kΩmin.
- Current Output (DC) / 4 to 20mA single output Load current: 750Ωmax.
4 to 20mA dual output Output 1: 550Ω max./Output 2: 350Ω max
- Conversion output variable range : Zero Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)
Span Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)

STANDARDS CONFORMITY

- Conversion accuracy : Within ±0.2% at 25±5 °C
- Conversion output : DC voltage, current (see "ORDERING INFORMATION")
- Temperature Effect : Better than ±0.2% of span per 10°C change in ambient.
- Response speed : 400m sec. max. (0 to 90%) at 100% step input
- Isolation : 4-way isolation between input, output 1, output 2, and power.
- Insulation Resistance : 100MΩ min. (@ 500V DC) between input, output 1, output 2, power, and ground.
- Dielectric Strength : Input / [Output 1, Output 2] / [Power, Ground]: 2000V AC for 1 minute.
Power / Ground: 2000V AC for 1 minute
Output 1 / Output 2: 500V AC for 1 minute
- Applicable standards : Safety IEC61010-1 and EN61010-1
EMC EN61326-1
RoHS directive supported

■ **POWER SECTION**

● Maximum power consumption :

Power	2 Voltage Outputs	2 Current Outputs	Dual Output
AC100V	3VA max.	4VA max.	4VA max.
AC240V	4.5VA max.	5.5VA max.	5.5VA max.
DC24V	1.1W max.	1.5W max.	1.6W max.

ORDERING INFORMATION

ITEMS	CODE	SPECIFICATIONS	
SERIES	CP3720-	CT Transmitter (Rms Calculation)	
INPUT	21	0 to 1A AC	
	22	0 to 5A AC	
OUTPUT 1	1	0 to 10mV DC	
	2	0 to 100mV DC	
	3	-10 to 10mV DC	
	4	-100 to 100mV DC	
	5	1 to 5V DC	
	6	4 to 20mA DC	
	7	0 to 5V DC	
	8	0 to 10V DC	
	9	Others (Please consult before ordering.)	
OUTPUT 2	0	None	
	1	0 to 10mV DC	
	2	0 to 100mV DC	
	3	- 10 to 10mV DC	
	4	- 100 to 100mV DC	
	5	1 to 5V DC	
	6	4 to 20mA DC * Note: Available only when output 1 (4 to 20mA DC) is selected.	
	7	0 to 5V DC	
	8	0 to 10V DC	
9	Others (Please consult before ordering.)		
POWER SUPPLY	90-	100 to 240V AC ±10% 50/60Hz	
	08-	24V DC ±10%	
REMARKS	0	Without	
	9	With (Please consult before ordering.)	


PT Transmitter (Rms Calculation)



OVERVIEW



Block Diagram & Terminal Wiring

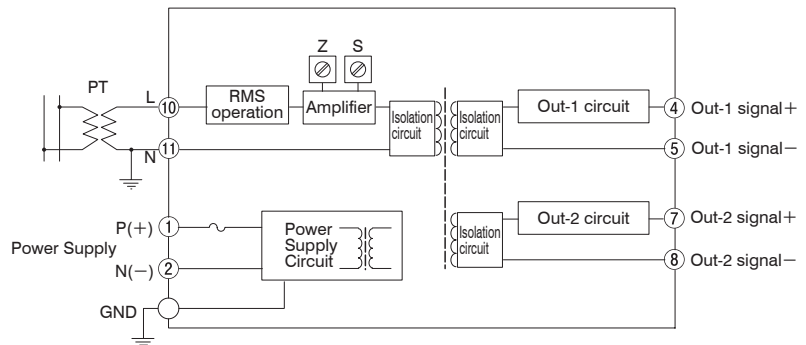

DESCRIPTION

CP3721 performs conditioning of AC voltage signal from PT to output the corresponding DC signals.

SPECIFICATIONS

INPUT SECTION

- Input : AC voltage (see "ORDERING INFORMATION")
- Input resistance : 1MΩmin. (1MΩ minimum without power)
- Input frequency : 50/60Hz
- Allowable input current : continuous, 120% of rated input value
: instantaneous, 1.5 times rated input value (5 sec.)
- Crest factor : 3 max.

OUTPUT SECTION

- Allowable Output Load : Voltage Output (DC) / 1V span and up Load current: 2mA max.
10mV span and up Load resistance: 10kΩmin.
100mV span and up Load resistance: 100kΩmin.
- Current Output (DC) / 4 to 20mA single output Load current: 750Ωmax.
4 to 20mA dual output Output 1: 550Ω max./Output 2: 350Ω max
- Conversion output variable range : Zero Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)
: Span Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)

STANDARDS CONFORMITY

- Conversion accuracy : Within ±0.2% at 25±5 °C
- Conversion output : DC voltage, current (see "ORDERING INFORMATION")
- Temperature Effect : Better than ±0.2% of span per 10°C change in ambient.
- Response Speed : 400 ms or less (0 to 90%) at 100% step input
- Isolation : 4-way isolation between input, output 1, output 2, and power.
- Insulation Resistance : 100MΩ min. (@ 500V DC) between input, output 1, output 2, power, and ground.
- Dielectric Strength : Input / [Output 1, Output 2] / [Power, Ground]: 2000V AC for 1 minute.
Power / Ground: 2000V AC for 1 minute
Output 1 / Output 2: 500V AC for 1 minute
- Applicable standards : Safety IEC61010-1 and EN61010-1
EMC EN61326-1
RoHS directive supported

POWER SECTION

- Maximum power consumption :

	Power	2 Voltage Outputs	2 Current Outputs	Dual Output
AC100V		3VA max.	4VA max.	4VA max.
AC240V		4.5VA max.	5.5VA max.	5.5VA max.
DC24V		1.1W max.	1.5W max.	1.6W max.

ORDERING INFORMATION


ITEMS	CODE	SPECIFICATIONS	
SERIES	CP3721-	PT Transmitter (Rms Calculation)	
INPUT	01	0 to 110V AC, 50/60Hz	
	02	0 to 150V AC, 50/60Hz	
	04	0 to 250V AC, 50/60Hz	
	99	Others (Please consult before ordering.)	
OUTPUT 1	1	0 to 10mV DC	
	2	0 to 100mV DC	
	3	-10 to 10mV DC	
	4	-100 to 100mV DC	
	5	1 to 5V DC	
	6	4 to 20mA DC	
	7	0 to 5V DC	
	8	0 to 10V DC	
	9	Others (Please consult before ordering.)	
OUTPUT 2	0	None	
	1	0 to 10mV DC	
	2	0 to 100mV DC	
	3	- 10 to 10mV DC	
	4	- 100 to 100mV DC	
	5	1 to 5V DC	
	6	4 to 20mA DC * Note: Available only when output 1 (4 to 20mA DC) is selected.	
	7	0 to 5V DC	
	8	0 to 10V DC	
9	Others (Please consult before ordering.)		
POWER SUPPLY	90-	100 to 240V AC \pm 10% 50/60Hz	
	08-	24V DC \pm 10%	
REMARKS	0	Without	
	9	With (Please consult before ordering.)	

DC-Frequency (Pulse) Converter




OVERVIEW

Block Diagram & Terminal Wiring

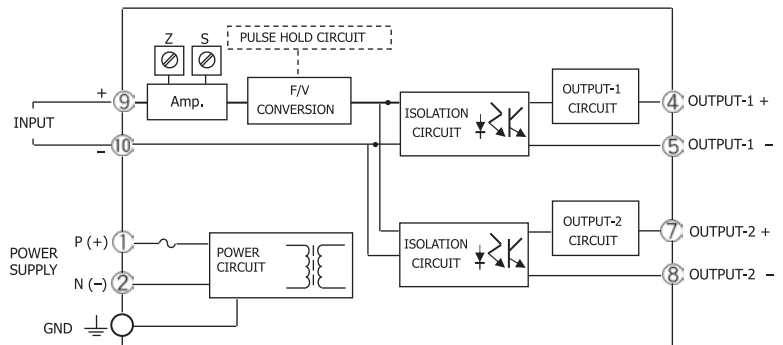


Note: When an inductive load, such as an electric motor, is connected to the photo MOS relay output, a relay contact protection circuit must be connected across the load.

Example of AC power connection:

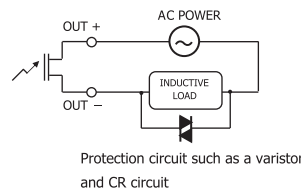

Example of DC power connection:

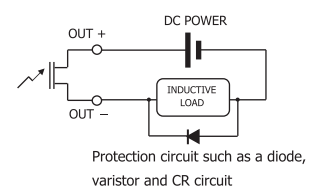

DESCRIPTION

The CP3729 is a slim, plug-in DC-Frequency (Pulse) Converter that converts DC current or voltage signals into pulse train signals. The unit provides isolated single or dual output.

SPECIFICATIONS

INPUT SECTION

- Input resistance : Voltage / input 1 MΩ or more
Current / input 250Ω
- Input tolerance : Voltage / input 30V DC max. continuous
Current / input 40mA DC max. continuous

OUTPUT SECTION

- Conversion output variable range : Zero Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)
: Span Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)
- Maximum Rating
 - Open Collector : Maximum rating: 30V, 100mA (Resistive load)
 - Photo MOS Relay : Maximum load voltage: 400V (Peak AC)
Maximum continuous load current: 0.15A (Peak AC)
Peak load current: 0.5A @ 100ms (1 shot) DC
Maximum output power dissipation: 360mW
ON resistance: 16Ω max.
Off-state leakage current: 1μA max.
- Duty Ratio without Pulse Hold Function : 40 to 60%

STANDARDS CONFORMITY

- Conversion accuracy : Within ±0.1% at 25±5 °C
- Temperature Effect : Better than ±0.2% of span per 10°C change in ambient.
- Response Time : Output Frequency
 - 50Hz / 65ms max.
 - 500Hz min. / 35ms max.

- Isolation : 4-way isolation between input, output 1, output 2, and power
- Insulation Resistance : 100MΩ min. (@ 500V DC) between input, output 1, output 2, power, and ground.
- Dielectric Strength : Input / [Output 1, Output 2] / [Power, Ground]: 2000V AC for 1 minute.
Power / Ground: 2000V AC for 1 minute
Output 1 / Output 2: 500V AC for 1 minute
- Applicable standards : RoHS directive supported

■ **POWER SECTION**

- Maximum power consumptio :

Power	AC100 to 240V	DC24V
1 output type	3.5VA max.	1.0W max.
2 output type	4.0VA max.	1.2W max.

ORDERING INFORMATION

ITEMS	CODE	SPECIFICATIONS	
SERIES	CP3729 -	DC-Frequency (Pulse) Converter	
SERIES	3	0 to 1V DC	
	4	0 to 10V DC	
	5	0 to 5V DC	
	6	1 to 5V DC	
	7	4 to 20mA DC	
	9	Others (Please consult before ordering.)	
OUTPUT 1	1	Open collector / 30V, 100mA (Resistive load)	
	2	Photo MOS relay / AC: 400V, 0.15A / DC:0.5A	
OUTPUT 2	0	None	
	1	Open collector / 30V, 100mA (Resistive load)	* Selectable only when output 1 is 1 (open collector)
	2	Photo MOS relay / AC: 400V,0.15A / DC:0.5A	* Selectable only when output 1 is 2 (photo MOS relay)
OUTPUT FREQUENCY RANGE	□□□	Selectable from the frequency code selection table below	
Power Supply	90 -	100 to 240V AC ±10% 50/60Hz	
	08 -	24V DC ±10%	
REMARKS	0	Without	
	9	With (Please consult before ordering.)	

■ Frequency range code selection table (Open collector)

Measuring Range	CODE
0 to 10Hz	701
0 to 20Hz	704
0 to 50Hz	711
0 to 100Hz	719
0 to 200Hz	726
0 to 500Hz	750
0 to 1000Hz	810
0 to 2000Hz	820
0 to 5000Hz	841

■ Frequency range code selection table (Photo MOS relay)

Measuring Range	CODE
0 to 10Hz	701
0 to 20Hz	704
0 to 30Hz	707


Distributor (Non-Isolation between Input and Output)



OVERVIEW



Block Diagram & Terminal Wiring

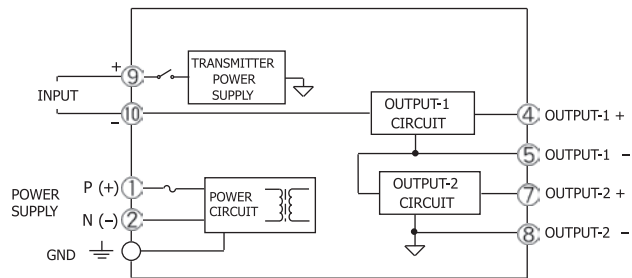

DESCRIPTION

The CP3737 is a slim plug-in Distributor that powers a two-wire transmitter, converts its 4 to 20mA signals into commonly used DC signals, and provides a dual output.

This model has no isolation between the input and output, providing a low-cost design. (The unit includes a transmitter power ON/OFF switch.)

SPECIFICATIONS

INPUT SECTION

- Input Signal : 4 to 20mA DC from 2-wire transmitters
- Input Resistance : 250Ω
- Transmitter Power Supply
 - Output voltage : 26.4V, typical. with 0% input 21.6V, typical. with 100% input (Output 2: short)
 - Maximum current : 22mA, typical.
- Limit Current for Short-Circuit Protection : 40mA max.
- Permissible Short-Circuit Duration : Continuous.

Note: If the transmitter power supply is used for sensor excitation, the sensor should be connected between the terminals INPUT (+) and OUTPUT-2 (-), while the OUTPUT-2 terminals (+) and (-) should be kept open.

OUTPUT SECTION

- Output Signal : Output 1: 1 to 5V DC
Output 2: 4 to 20mA DC
- Allowable Load Resistance : Output 1: 250kΩ min.
Output 2: 10Ω max.
(Up to 260Ω is allowable if the plus and minus terminals of OUTPUT-1 are short connected.)

STANDARDS CONFORMITY

- Conversion accuracy : Within ±0.1% (Depends on accuracy of receiving resistor)
- Ambient temperature effect : Within ±0.03% of span for 10°C change (temperature coefficient of receiving resistor)
- Isolation : 4-way isolation between input, output 1, output 2, and power.
- Insulation Resistance : 100MΩ min. (@ 500V DC) between input, output 1, output 2, power, and ground.
- Dielectric Strength : [Input, Output 1, Output 2] / [Power, Ground]: 2000V AC for 1 minute
Power / Ground: 2000V AC for 1 minute
- Applicable standards : Safety IEC61010-1 and EN61010-1
EMC EN61326-1
RoHS directive supported

POWER SECTION

- Maximum power consumption : AC100 to 240V / 5.0VA max.
DC24V / 1.5W max.

ORDERING INFORMATION

ITEMS	CODE	SPECIFICATIONS	
SERIES	CP3737 -	Distributor (Non-Isolation between Input and Output)	
POWER SUPPLY	90 -	100 to 240V AC	
	08 -	24V DC	
REMARKS	0	Without	
	9	With (Please consult before ordering.)	


Signal Reverser



OVERVIEW

CE approved

Block Diagram & Terminal Wiring

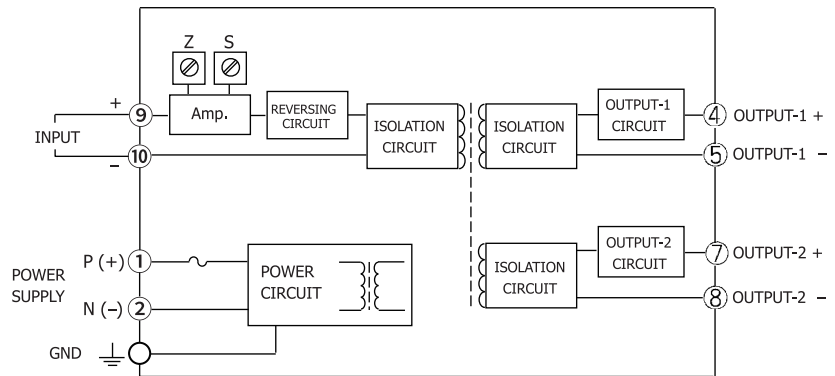

DESCRIPTION

The CP3740 is a slim, plug-in Signal Reverser that converts DC current or voltage input signals into DC signals inversely proportional to those input signals and provides isolated single or dual output.

SPECIFICATIONS

INPUT SECTION

- Input resistance : Voltage / input 1 MΩ or more
Current / input 250Ω
- Input tolerance : Voltage / input 30V DC max. continuous
Current / input 40mA DC max. continuous

OUTPUT SECTION

- Allowable Output Load : Voltage Output (DC) / 1V span and up Load current: 2mA max.
10mV span and up Load resistance: 10kΩmin.
100mV span and up Load resistance: 100kΩmin.
- Conversion output variable range : Current Output (DC) / 4 to 20mA single output Load current: 750Ωmax.
4 to 20mA dual output Output 1: 550Ω max./Output 2: 350Ω max
- Zero Adjustment : Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)
- Span Adjustment : Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)

STANDARDS CONFORMITY

- Conversion accuracy : Within ±0.1% at 25±5 °C
- Temperature Effect : Better than ±0.2% of span per 10°C change in ambient.
- Response Time : 85ms max. (0 to 90%) with a step input at 100%.
- Isolation : 4-way isolation between input, output 1, output 2, and power.
- Insulation Resistance : 100MΩ min. (@ 500V DC) between input, output 1, output 2, power, and ground.
- Dielectric Strength : Input / [Output 1, Output 2] / [Power, Ground]: 2000V AC for 1 minute.
Power / Ground: 2000V AC for 1 minute
Output 1 / Output 2: 500V AC for 1 minute
- Applicable standards : Safety IEC61010-1 and EN61010-1
EMC EN61326-1
RoHS directive supported

POWER SECTION

- Maximum power consumption :

Power	AC100 to 240V	DC24V
1 output type	4.0VA max.	1.2W max.
2 output type	5.0VA max.	1.5W max.

ORDERING INFORMATION


ITEMS	CODE	SPECIFICATIONS	
SERIES	CP3740 -	Signal Reverser	
INPUT	3	0 to 1V DC	
	4	0 to 10V DC	
	5	0 to 5V DC	
	6	1 to 5V DC	
	7	4 to 20mA DC	
	9	Others (Please consult before ordering.)	
OUTPUT 1	1	10 to 0mV DC	
	2	100 to 0mV DC	
	3	1 to 0V DC	
	4	10 to 0V DC	
	5	5 to 0V DC	
	6	5 to 1V DC	
	7	20 to 4mA DC	
	9	Others (Please consult before ordering.)	
OUTPUT 2	0	None	
	1	10 to 0mV DC	
	2	100 to 0mV DC	
	3	1 to 0V DC	
	4	10 to 0V DC	
	5	5 to 0V DC	
	6	5 to 1V DC	
	7	20 to 4mA DC	* Note: Available only when output 1 (4 to 20mA DC) is selected.
	9	Others (Please consult before ordering.)	
POWER SUPPLY	90 -	100 to 240V AC	
	08 -	24V DC	
REMARKS	0	Without	
	9	With (Please consult before ordering.)	

Adder



OVERVIEW

Block Diagram & Terminal Wiring

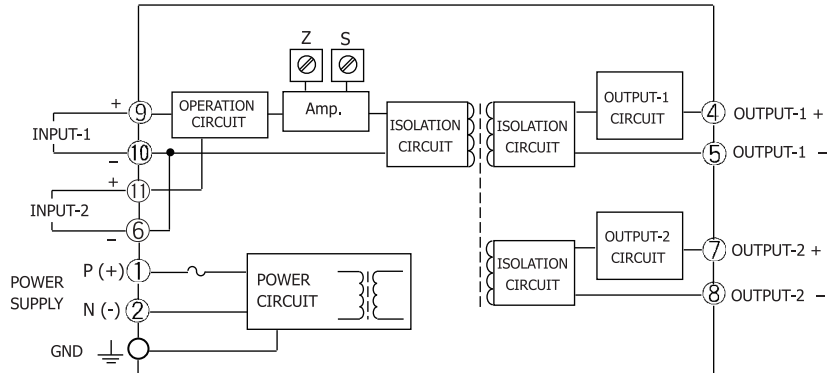

DESCRIPTION

The CP3761 is a slim, plug-in Adder that receives two DC current or voltage signals and outputs a signal proportional to the sum of those signals. The unit provides isolated single or dual output.

SPECIFICATIONS

INPUT SECTION

- Input resistance : Voltage / input 1 MΩ or more
Current / input 250Ω
- Input tolerance : Voltage / input 30V DC max. continuous
Current / input 40mA DC max. continuous

OUTPUT SECTION

- Allowable Output Load : Voltage Output (DC) / 1V span and up Load current: 2mA max.
10mV span and up Load resistance: 10kΩmin.
100mV span and up Load resistance: 100kΩmin.
- Conversion output variable range : Current Output (DC) / 4 to 20mA single output Load current: 750Ωmax.
4 to 20mA dual output Output 1: 550Ω max./Output 2: 350Ω max
- Output Range : Zero Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)
Span Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)
- Equation : 0 to approx. 120%
- Equation : $OUT (\%) = IN1(\%) \times K1 + IN2(\%) \times K2$
 $IN1 \cdot IN2: 0 \text{ to } 120\%$

STANDARDS CONFORMITY

- Conversion accuracy : Within ±0.1% at 25±5 °C
- Coefficient setting range : (Specify when ordering) K1=0.1 to 2.0 K2=0.1 to 2.0
- Temperature Effect : Better than ±0.2% of span per 10°C change in ambient.
- Response Time : 85ms max. (0 to 90%) with a step input at 100%.
- Isolation : 4-way isolation between input, output 1, output 2, and power.
- Insulation Resistance : 100MΩ min. (@ 500V DC) between input, output 1, output 2, power, and ground.
- Dielectric Strength : Input / [Output 1, Output 2] / [Power, Ground]: 2000V AC for 1 minute.
Power / Ground: 2000V AC for 1 minute
Output 1 / Output 2: 500V AC for 1 minute
- Applicable standards : RoHS directive supported

POWER SECTION

- Maximum power consumption :

	Power	AC100 to 240V	DC24V
1 output type		4.5VA max.	1.4W max.
2 output type		5.5VA max.	1.7W max.

ORDERING INFORMATION

ITEMS	CODE	SPECIFICATIONS	
SERIES	CP3761 -	Adder	
INPUT	3	0 to 1V DC	
	4	0 to 10V DC	
	5	0 to 5V DC	
	6	1 to 5V DC	
	7	4 to 20mA DC	
	9	Others (Please consult before ordering.)	
INPUT COEFFICIENT (K1)	01 to 20	Selectable from 0.1 to 2.0 times	
INPUT COEFFICIENT (K2)	01 to 20	Selectable from 0.1 to 2.0 times	
OUTPUT 1	1	0 to 10mV DC	
	2	0 to 100mV DC	
	3	0 to 1V DC	
	4	0 to 10V DC	
	5	0 to 5V DC	
	6	1 to 5V DC	
	7	4 to 20mA DC	
	9	Others (Please consult before ordering.)	
	OUTPUT 2	0	None
1		0 to 10mV DC	
2		0 to 100mV DC	
3		0 to 1V DC	
4		0 to 10V DC	
5		0 to 5V DC	
6		1 to 5V DC	
7		4 to 20mA DC * Note: Available only when output 1 (4 to 20mA DC) is selected.	
9		Others (Please consult before ordering.)	
POWER SUPPLY	90 -	100 to 240V AC ±10% 50/60Hz	
	08 -	24V DC ±10%	
REMARKS	0	Without	
	9	With (Please consult before ordering.)	

Please specify the input coefficient within the range of 0.1 to 2.0 times.


Note: $0.4 \leq K1 + K2$

Subtractor



OVERVIEW

Block Diagram & Terminal Wiring

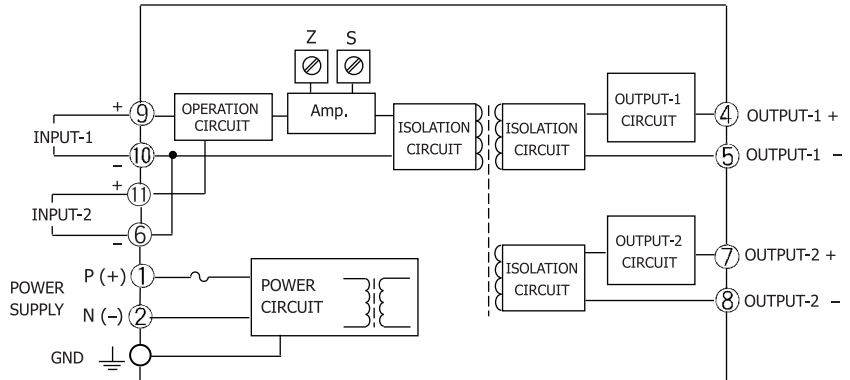

DESCRIPTION

The CP3762 is a slim, plug-in Subtractor that receives two DC current or voltage signals and outputs a signal proportional to the difference between those signals. The unit provides isolated single or dual output.

SPECIFICATIONS

INPUT SECTION

- Input resistance : Voltage / input 1 MΩ or more
Current / input 250Ω
- Input tolerance : Voltage / input 30V DC max. continuous
Current / input 40mA DC max. continuous

OUTPUT SECTION

- Allowable Output Load : Voltage Output (DC) / 1V span and up Load current: 2mA max.
10mV span and up Load resistance: 10kΩmin.
100mV span and up Load resistance: 100kΩmin.
- Conversion output variable range : Current Output (DC) / 4 to 20mA single output Load current: 750Ωmax.
4 to 20mA dual output Output 1: 550Ω max./Output 2: 350Ω max
- Output Range : Zero Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)
Span Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)
- Equation : 0 to approx. 120%

where
 $Output\ (\%) = IN1\ (\%) \times K1 - IN2\ (\%) \times K2$
 IN1: Input 1 (%), K1: Input-1 factor
 IN2: Input 2 (%), K2: Input-2 factor
 * IN1 & IN2: 0 to 120%

STANDARDS CONFORMITY

- Conversion accuracy : Within ±0.1% at 25±5 °C
- Temperature Effect : Better than ±0.2% of span per 10°C change in ambient.
- Response Time : 85ms max. (0 to 90%) with a step input at 100%.
- Isolation : 4-way isolation between input, output 1, output 2, and power.
- Insulation Resistance : 100MΩ min. (@ 500V DC) between input, output 1, output 2, power, and ground.
- Dielectric Strength : Input / [Output 1, Output 2] / [Power, Ground]: 2000V AC for 1 minute.
Power / Ground: 2000V AC for 1 minute
Output 1 / Output 2: 500V AC for 1 minute
- Applicable standards : RoHS directive supported

■ **POWER SECTION**

- Maximum power consumption

Power	AC100 to 240V	DC24V
1 output type	4.5VA max.	1.4W max.
2 output type	5.5VA max.	1.7W max.

ORDERING INFORMATION

ITEMS	CODE	SPECIFICATIONS	
SERIES	CP3762 -	Subtractor	
INPUT	3	0 to 1V DC	
	4	0 to 10V DC	
	5	0 to 5V DC	
	6	1 to 5V DC	
	7	4 to 20mA DC	
	9	Others (Please consult before ordering.)	
INPUT COEFFICIENT (K1)	04 to 20	Selectable from 0.4 to 2.0 times	
INPUT COEFFICIENT (K2)	01 to 20	Selectable from 0.1 to 2.0 times	
OUTPUT 1	1	0 to 10mV DC	
	2	0 to 100mV DC	
	3	0 to 1V DC	
	4	0 to 10V DC	
	5	0 to 5V DC	
	6	1 to 5V DC	
	7	4 to 20mA DC	
	9	Others (Please consult before ordering.)	
	OUTPUT 2	0	None
1		0 to 10mV DC	
2		0 to 100mV DC	
3		0 to 1V DC	
4		0 to 10V DC	
5		0 to 5V DC	
6		1 to 5V DC	
7		4 to 20mA DC * Note: Available only when output 1 (4 to 20mA DC) is selected.	
9		Others (Please consult before ordering.)	
POWER SUPPLY	90 -	100 to 240V AC ±10% 50/60Hz	
	08 -	24V DC ±10%	
REMARKS	0	Without	
	9	With (Please consult before ordering.)	

Please specify the input coefficient.
 Note: K1 is 0.4 to 2.0, K2 is 0.1 to 2.0


Signal Isolator




OVERVIEW

Block Diagram & Terminal Wiring

Current Input / Current Output Model:

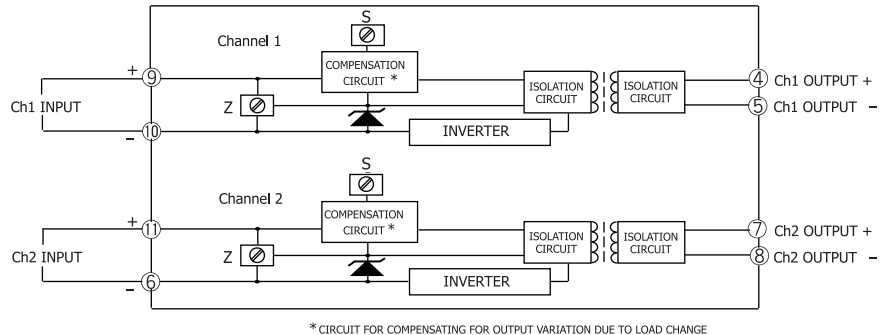

Current Input / Voltage Output Model:

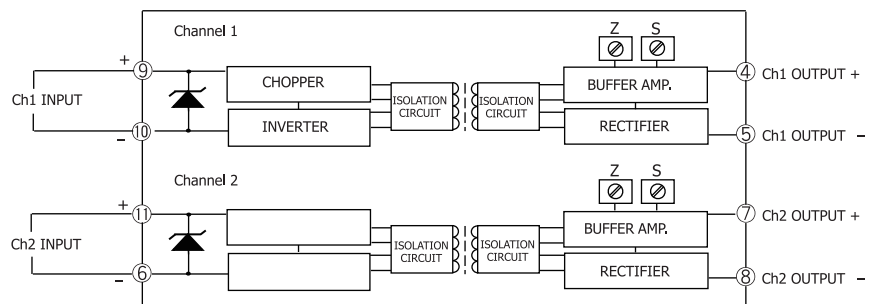

DESCRIPTION

The CP3764 is a slim, plug-in Signal Isolator that takes the power from its input current loop.

SPECIFICATIONS


INPUT SECTION

- Input Signal : 4 to 20mA DC
- Input Resistance
- Voltage Output Model : Approx. 250Ω (for 20mA DC input)
- Current Output Model : Approx. 230Ω + Load resistance (for 20mA DC input)
- Allowable Input Current : 30mA DC max.


OUTPUT SECTION

- Allowable Output Load
- Voltage Output (DC) : 50kΩ min.
- Current Output (DC) : 4 to 20mA 350Ω max.
(Allowable load resistance: 50 to 350Ω)
- Zero Adjustment
- Voltage Output Model : Approx. ±2.5% of span.
- Current Output Model : Approx. ±0.5% of span.
(Adjustable by the front-accessible trimmer.)
- Span Adjustment
- Voltage Output Model : Approx. ±2.5% of span.
- Current Output Model : Approx. ±1.5% of span.
(Adjustable by the front-accessible trimmer.)

Voltage Output

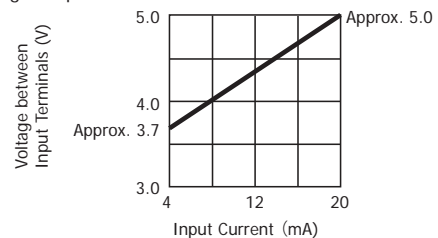

Current Output

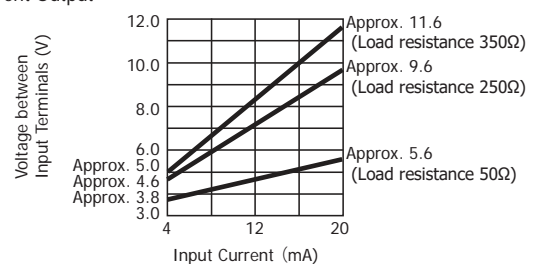

■ **STANDARDS CONFORMITY**

- Conversion accuracy : Within $\pm 0.15\%$
- Temperature Effect : Better than $\pm 0.2\%$ of span per 10°C change in ambient.
- Response Time : 15msec max.(0 to 90%) at 100% step input
- Output Variation due to Load : 0.01%/ Ω (50 to 150 Ω)
Change : 0.005%/ Ω (150 to 350 Ω)
* Adjusted at 250 Ω for shipment.
- Isolation : Isolation between input and output, and channels.
- Insulation Resistance : 100M Ω min. (@ 500V DC) between input and output, and channels.
- Dielectric Strength : Input / Output: 1500V AC for 1 minute (Cutoff current: 0.5mA)
Channel to Channel: 1500V AC for 1 minute (Cutoff current: 0.5mA)
- Applicable standards : RoHS directive supported

ORDERING INFORMATION


ITEMS	CODE	SPECIFICATIONS	
SERIES	CP3764 -	Signal Isolator	
OUTPUT 2	6	1 to 5V DC	
	7	4 to 20mA DC	
REMARKS	0	Without	
	9	With (Please consult before ordering.)	

Multiplier (Arithmetic Operation Unit)



OVERVIEW

Block Diagram & Terminal Wiring

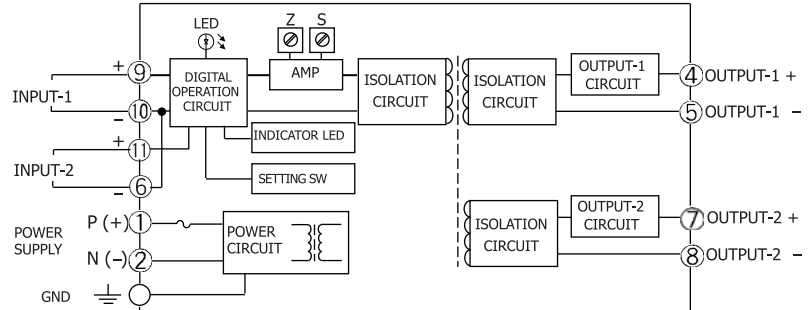

DESCRIPTION

The CP3765 is a slim, plug-in Multiplier that receives two DC current or voltage signals and outputs a signal proportional to the result (sum, difference, product, or quotient) of an arithmetic operation (addition, subtraction, multiplication, or division). The unit provides isolated single or dual output.

SPECIFICATIONS

INPUT SECTION

- Input Resistance
 - Voltage Input (DC) : With or without power: 1MΩ min.
 - Current Input (DC) : 250Ω
- Allowable Input Voltage
 - Voltage Input Model : 30V DC max., continuous
 - Current Input Model : 40mA DC max., continuous
- Input Range : 0 to 120%

OUTPUT SECTION

- Allowable Output Load
 - Voltage Output (DC) / 1V span and up Load current: 2mA max.
 - 10mV span and up Load resistance: 10kΩmin.
 - 100mV span and up Load resistance: 100kΩmin.
 - Current Output (DC) / 4 to 20mA single output Load current: 750Ωmax.
 - 4 to 20mA dual output Output 1: 550Ω max./Output 2: 350Ω max
- Conversion output variable range
 - : Zero Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)
 - : Span Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)
- Output Range : 0 to approx. 120%

STANDARDS CONFORMITY

- Equations
 - : Addition $Y = (IN1 \times K1) + (IN2 \times K2)$
 - : Subtraction $Y = (IN1 \times K1) - (IN2 \times K2)$
 - : Multiplication $Y = (IN1 \times K1) \times (IN2 \times K2)$
 - : Division $Y = (IN1 \times K1) / (IN2 \times K2)$
- Factor Setting Range
 - : The factors K1 and K2 should be set in steps of 0.01 within the following respective ranges.
 - Addition $K1 = 0.10$ to 2.00 $K2 = 0.10$ to 2.00 ($K1 + K2 \geq 0.40$)
 - Subtraction $K1 = 0.40$ to 2.00 $K2 = 0.10$ to 2.00
 - Multiplication $K1 = 0.20$ to 2.00 $K2 = 0.20$ to 2.00 ($0.4 \leq K1 \times K2 \leq 2.00$)
 - Division $K1 = 0.10$ to 2.00 $K2 = 0.10$ to 2.00 ($0.4 \leq K1/K2 \leq 2.00$)
- Accuracy Rating
 - : (at 25°C±5°C)
 - Addition
 - If $K1 \leq 1.00$ and $K2 \leq 1.00$: Better than ±0.2% of span.
 - If $K1 > 1.00$ or $K2 > 1.00$: Better than ±0.4% of span.
 - Subtraction
 - If $K1 \leq 1.00$ and $K2 \leq 1.00$: Better than ±0.2% of span.
 - If $K1 > 1.00$ or $K2 > 1.00$: Better than ±0.4% of span.
 - Multiplication
 - If $K1 \times K2 \leq 1.00$: Better than ±0.2% of span.
 - If $K1 \times K2 > 1.00$: Better than ±0.4% of span.
 - Division
 - If $K1/K2 \leq 1.00$ ($IN2 \geq 20\%$): Better than ±1.0% of span.
 - If $K1/K2 > 1.00$ ($IN2 \geq 20\%$): Better than ±2.0% of span.


Remarks
 Y: Output (%)
 K1: Input-1 factor, K2: Input-2 factor
 IN1: Input 1 (%), IN2: Input 2 (%)

- Temperature Effect : Better than $\pm 0.15\%$ of span per 10°C change in ambient.
- Response Time : 150ms max. (0 to 90%) with a step input at 100%.
- Factor Indicator : Red LED, digit height 8.0mm, 3 digits.
- Isolation : 4-way isolation between input, output 1, output 2, and power.
- Insulation Resistance : 1100M Ω min. (@ 500V DC) between input, output 1, output 2, power, and ground.
- Dielectric Strength : Input / [Output 1, Output 2] / [Power, Ground]:
2000V AC for 1 minute
Power / Ground: 2000V AC for 1 minute
Output 1 / Output 2: 500V AC for 1 minute
- Applicable standards : RoHS directive supported

■ POWER SECTION

● Maximum power consumption	Power	AC100 to 240V	DC24V
	1 output type	6.0VA max.	1.7W max.
	2 output type	6.5VA max.	2.1W max.

FRONT VIEW

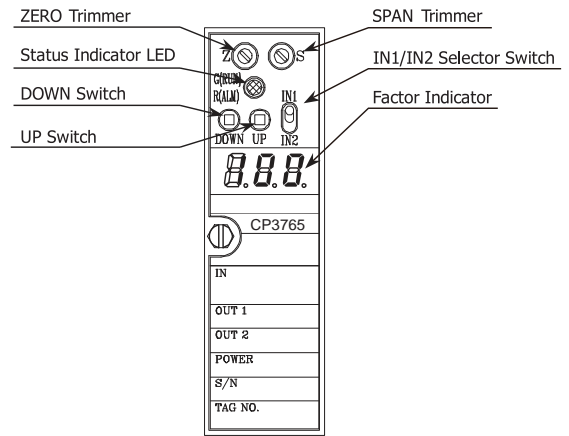

ORDERING INFORMATION


ITEMS	CODE	SPECIFICATIONS	
SERIES	CP3765 -	Multiplier (Arithmetic Operation Unit)	
INPUT 1	3	0 to 1V DC	
	4	0 to 10V DC	
	5	0 to 5V DC	
	6	1 to 5V DC	
	7	4 to 20mA DC	
	9	Others (Please consult before ordering.)	
INPUT 2	3	0 to 1V DC	
	4	0 to 10V DC	
	5	0 to 5V DC	
	6	1 to 5V DC	
	7	4 to 20mA DC	
	9	Others (Please consult before ordering.)	
OUTPUT 1	1	0 to 10mV DC	
	2	0 to 100mV DC	
	3	0 to 1V DC	
	4	0 to 10V DC	
	5	0 to 5V DC	
	6	1 to 5V DC	
	7	4 to 20mA DC	
	9	Others (Please consult before ordering.)	
OUTPUT 2	0	None	
	1	0 to 10mV DC	
	2	0 to 100mV DC	
	3	0 to 1V DC	
	4	0 to 10V DC	
	5	0 to 5V DC	
	6	1 to 5V DC	
	7	4 to 20mA DC	* Note: Available only when output 1 (4 to 20mA DC) is selected.
	9	Others (Please consult before ordering.)	
POWER SUPPLY	90 -	100 to 240V AC $\pm 10\%$	50/60Hz
	08 -	24V DC $\pm 10\%$	
REMARKS	0	Without	
	9	With (Please consult before ordering.)	

Analog hold Converter



OVERVIEW

Block Diagram & Terminal Wiring

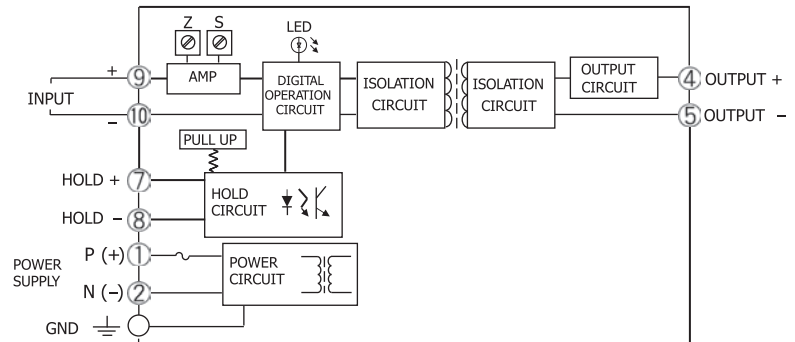

DESCRIPTION

The CP3766 is a slim, plug-in Analog hold Converter that holds an output signal using external hold input and provides an isolated single output.

SPECIFICATIONS

INPUT SECTION

- Input Resistance
 - Voltage Input (DC) : With or without power: 1MΩ min.
 - Current Input (DC) : 250Ω
- Allowable Input Voltage
 - Voltage Input Model : 30V DC max., continuous
 - Current Input Model : 40mA DC max., continuous
- Hold Input : Contact input type (internal supply 24VDC, 10mA) Hold on short-circuit

OUTPUT SECTION

- Allowable Output Load
 - Voltage Output (DC) / 1V span and up Load current: 2mA max.
 - 10mV span and up Load resistance: 10kΩmin.
 - 100mV span and up Load resistance: 100kΩmin.
 - Current Output (DC) / 4 to 20mA single output Load current: 750Ωmax.
 - 4 to 20mA dual output Output 1: 550Ω max./Output 2: 350Ω max
- Conversion output variable range
 - : Zero Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)
 - : Span Adjustment Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)

STANDARDS CONFORMITY

- Conversion accuracy : Within ±0.2% at 25±5 °C
- Temperature Effect : Better than ±0.15% of span per 10°C change in ambient.
- Response Time : 400ms max. (0 to 90%) with a step input at 100%.
- Isolation : Isolation between input, hold input, output, and power.
- Insulation Resistance : 100MΩ min. (@ 500V DC) between input, hold input, output, power, and ground.
- Dielectric Strength : Input / [Output, Hold input] / [Power, Ground]: 2000V AC for 1 minute
- Power / Ground: 2000V AC for 1 minute
- Output / Hold input: 500V AC for 1 minute
- Applicable standards : RoHS directive supported

■ **LED STATUS INDICATORS**

● Indicator Patterns

No.	Event	Hold Status Indicator LED		output signal	Recovery Operation
		Red LED	Green LED		
1	Power ON	Green LED turns ON for 1 second, and then red LED turns ON for 0.5 second. This cycle is repeated 3 times.		Normal	—
2	Normal operation	OFF	ON	Normal	—
3	Hold operation	OFF	Blinks at 1 second intervals	Held value	—
4	Held value recording error	Blinks at 1 second intervals	OFF	Held value: 0% or less	Cancel the hold mode.
5	DAC error	Blinks at 0.25 second intervals.	OFF	Typically 0% or less, but may vary.	None
6	System error	ON	Not defined	Typically 0% or less, but may vary.	None


* There are times an output signal is undefined in item 5-6.

* There are times the red LED does not flash in item 6.

■ **POWER SECTION**

- Maximum power consumption : AC100 to 240V / 6.5VA max.
DC24V / 1.8W max.


FRONT VIEW

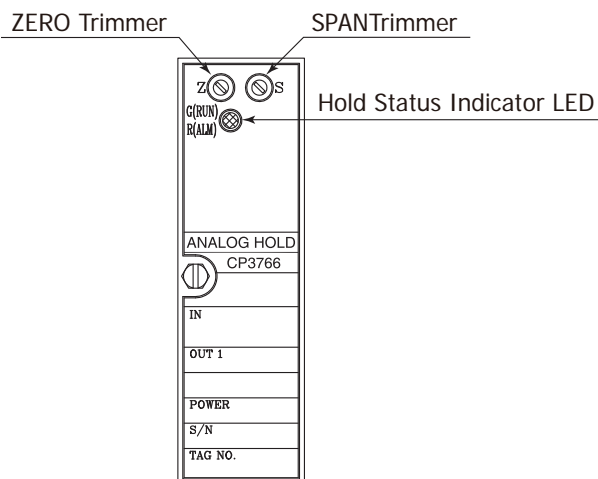

ORDERING INFORMATION

ITEMS	CODE	SPECIFICATIONS
SERIES	CP3766 -	Analog hold Converter
INPUT	3	0 to 1V DC
	4	0 to 10V DC
	5	0 to 5V DC
	6	1 to 5V DC
	7	4 to 20mA DC
	9	Others (Please consult before ordering.)
OUTPUT	1	0 to 10mV DC
	2	0 to 100mV DC
	3	0 to 1V DC
	4	0 to 10V DC
	5	0 to 5V DC
	6	1 to 5V DC
	7	4 to 20mA DC
	9	Others (Please consult before ordering.)
	POWER SUPPLY	90 -
08 -		24V DC ±10%
REMARKS	0	Without
	9	With (Please consult before ordering.)

EXTERNAL DIMENSIONS

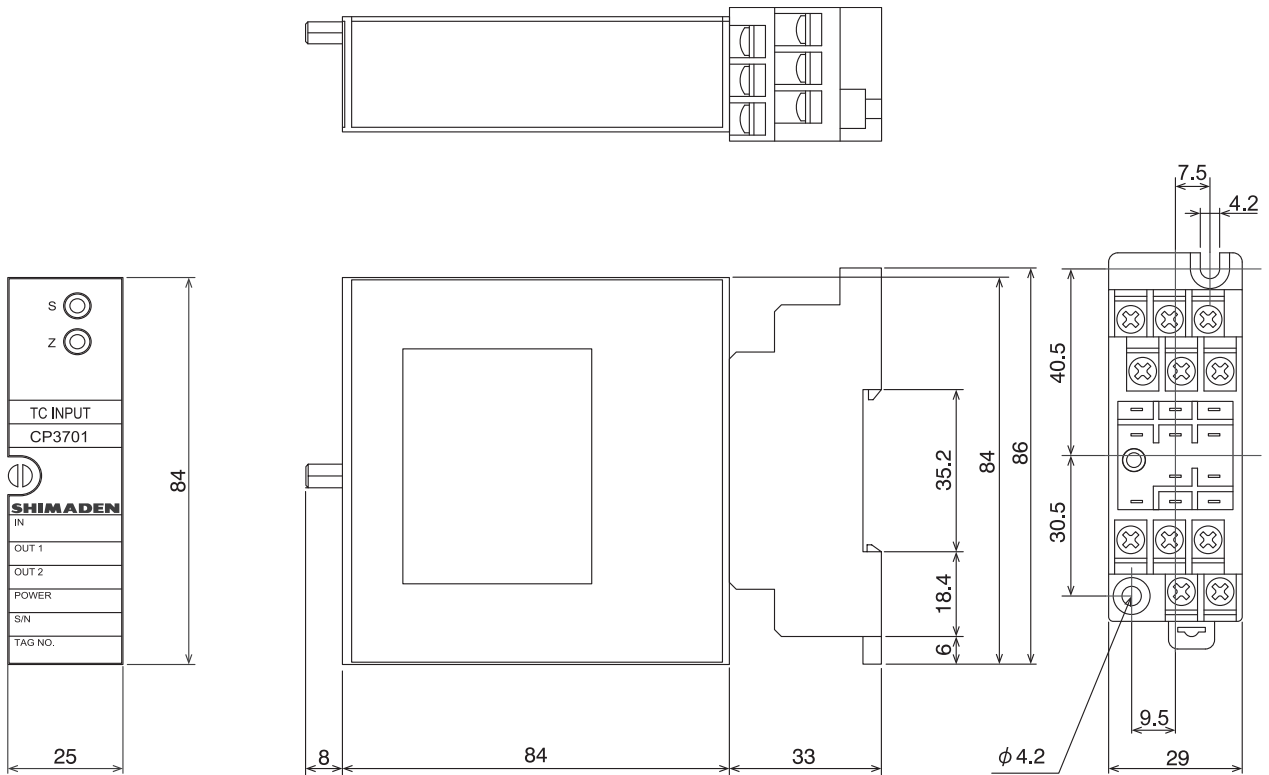

Unit : mm

Warning

* The CP3700 Series is designed for the control of temperature, humidity and other physical values of general industrial equipment. It is not be used for any purpose which regulates the prevention of the serious effect on human life or safety.

Warning

* The possibility of loss or damage to your system or property as a result of failure of any part of the process exists, proper safety measures must be made before the instrument is put into use so as to prevent the occurrence of trouble.

Head Office & Saitama Factory
ISO 9001/ISO 14001 Certification Obtained

(The contents of this brochure are subject to change without notice.)

Temperature and Humidity Control Specialists
SHIMADEN CO., LTD.

Head Office: 2-30-10 Kitamachi, Nerima-Ku, Tokyo 179-0081 Japan
 Phone: +81-3-3931-7891 Fax: +81-3-3931-3089
 E-MAIL: exp-dept@shimaden.co.jp URL: <https://www.shimaden.co.jp>