

°C

%RH

SHIMADEN

Series **SR1 / SR3 / SR4**

SHIMADEN DIGITAL CONTROLLER

BASIC FEATURES

- Multi-input and multi-range performance
- Large 20mm bright display (SR3)
- Dust and splash proof front panel NEMA4X / IP66



cULus CE approved

ORDERING INFORMATION

ITEM	CODE	SPECIFICATIONS
SERIES	SR1 –	MPU-Based Auto-Tuning PID Digital Controller, DIN H48 x W48 x D111mm
	SR3 –	MPU-Based Auto-Tuning PID Digital Controller, DIN H96 x W96 x D111mm
	SR4 –	MPU-Based Auto-Tuning PID Digital Controller, DIN H96 x W48 x D111mm
INPUT	8	Multi input
		Thermocouple: B, R, S, K, E, J, T, N, PLII, WRe5-26 {U, L (DIN 43710)}
	6	R.T.D.: Pt100/JPt100
		Voltage(mV): -10~10, 0~10, 0~20, 0~50, 10~50, 0~100mV DC
CONTROL OUTPUT	Scaling possible	
	Range: -1999~9999	
	Span: 10~5000	
	Voltage (V): -1~1, 0~1, 0~2, 0~5, 1~5, 0~10V DC	
EVENT OUTPUT	1	0~20mA DC:(V) 0~5V DC
		Current (mA): 4~20mA DC:(V) 1~5V DC
		(applied via enclosed 250Ω shunt resistor)
REMARKS	Y –	Contact 1a Contact capacity: 240V AC 2.0A/resistive load Proportional cycle: 1~120 seconds
	I –	Current 4~20mA DC Load Resistance: 600Ω max.
	P –	SSR drive voltage 12V ±1.5V DC 30mA max. Proportional cycle:1~120 seconds
	V –	Voltage 0~10V DC Load current: 2mA max.
EVENT OUTPUT		Event output (1a) x 2 points, Contact capacity: 240V AC 1A/resistive load
REMARKS		W Without
REMARKS		X With (Please consult before ordering.)

MEASURING RANGE CODES

Type of input	Code	Scaling range
Thermocouple	B *1	01 0 ~ 1800 °C 0 ~ 3300 °F
	R	02 0 ~ 1700 °C 0 ~ 3100 °F
	S	03 0 ~ 1700 °C 0 ~ 3100 °F
	*3	04 -199.9 ~ 400.0°C -300 ~ 750 °F
	K	05 0.0 ~ 800.0°C 0 ~ 1500 °F
		06 0 ~ 1200 °C 0 ~ 2200 °F
	E	07 0 ~ 700 °C 0 ~ 1300 °F
	J	08 0 ~ 600 °C 0 ~ 1100 °F
	T *3	09 -199.9 ~ 200.0°C -300 ~ 400 °F
	N	10 0 ~ 1300 °C 0 ~ 2300 °F
	PLII *4	11 0 ~ 1300 °C 0 ~ 2300 °F
	WRe5-26*5	12 0 ~ 2300 °C 0 ~ 4200 °F
	U *2, *3	13 -199.9 ~ 200.0°C -300 ~ 400 °F
	L *2	14 0 ~ 600 °C 0 ~ 1100 °F
R.T.D.	Pt100	31 -200 ~ 600 °C -300 ~ 1100 °F
		32 -100.0 ~ 100.0°C -150.0 ~ 200.0°F
		33 -50.0 ~ 50.0°C -50.0 ~ 120.0°F
		34 0.0 ~ 200.0°C 0.0 ~ 400.0°F
	JPt100	35 -200 ~ 500 °C -300 ~ 1000 °F
		36 -100.0 ~ 100.0°C -150.0 ~ 200.0°F
		37 -50.0 ~ 50.0°C -50.0 ~ 120.0°F
		38 0.0 ~ 200.0°C 0.0 ~ 400.0°F

Type of input	Code	Scaling range
Voltage (mV)	-10 ~ 10	71
	0 ~ 10	72
	0 ~ 20	73
	0 ~ 50	74
	10 ~ 50	75
Voltage (V)	0 ~ 100	76
	-1 ~ 1	81
	0 ~ 1	82
	0 ~ 2	83
	0 ~ 5	84
	1 ~ 5	85
	0 ~ 10	86

- Note:** *1 Thermocouple B: Accuracy guarantee not applicable Temp. below 400°C.
 *2 Thermocouple U, L: DIN 43710
 *3 Thermocouple K, T, U: Accuracy guarantee not applicable Temp. below -100.0°C ±(1.0%FS+1digit) & -100.0 ~ 0.0°C ±(0.5%FS+1digit)
 *4 Thermocouple PLII: Platinel
 *5 Thermocouple WRe5-26: ASTM988

*Unless otherwise specified, following setting will be applied for shipment.

Input	Specification/Rating	Measuring range
Multi input	K thermocouple	0.0 ~ 800.0°C
Voltage (V)	0 ~ 10V DC	0.0 ~ 100.0


Control Output	Control Mode
Y	ON-OFF (P=OFF)
I, P, V	PID Control (P=3.0)

SPECIFICATIONS


Series SR1 / SR3 / SR4

Model ● SR1: 48 × 48 Digital Controller ● SR3: 96 × 96 Digital Controller ● SR4: 96 × 48 Digital Controller	
Display ● Digital display SR1, SR4: (PV)/4 digit 7 segments red LED (H: 11mm) (SV)/4 digit 7 segments green LED (H: 9.5mm) SR3: (PV)/4 digit 7 segments red LED (H: 20mm) (SV)/4 digit 7 segments green LED (H: 13mm)	
● Display accuracy: ± (0.5%FS + 1 digit) (see "Note" in Measuring Range Codes) (Excluding cold junction compensation accuracy)	
● Display accuracy maintaining range: 23°C ± 5°C	
● Display resolution: Depends on measuring range (0.001, 0.01, 0.1, 1)	
● Display updating cycle: 0.5 seconds	
● Action display: 5 LED lamp displays (OUT/EV1/EV2/AT/MAN)	
Setting ● Setting method: By operating 4 keys (▼, ▲, ENT, C) (front panel) ● Target value setting range: Same as measuring range (within setting limiter) Individual setting for higher & lower limits are possible within measuring range (Lower limit value < Higher limit value)	
● Setting limiter: Same as measuring range (within setting limiter) Individual setting for higher & lower limits are possible within measuring range (Lower limit value < Higher limit value)	
Input ● Type of input: Selectable from multiple (TC, Pt, mV) and voltage (V) *Current input 0-20mA DC (Voltage: 0-5V), 4-20mA DC (Voltage: 1-5V) applied via 250Ω shunt resistor B, R, S, K, E, J, T, N, PL II, WRe5-26, {U, L (DIN 43710)} Input impedance: 500kΩ minimum External resistance tolerance: 100 Ω maximum Burnout function: Standard feature (up scale) Cold junction compensation accuracy: ± 1°C (within 23°C ± 5°C) ± 2°C (ambient temperature: 5°C to 45°C) Pt100/JPT100, 3-wire type	
● R.T.D.: Amperage: 0.25 mA Lead wire tolerance: Lead wire tolerance: 5Ω maxi/wire (3 lead wires should have the same resistance.)	
● Voltage mV: ~10~10.0~10.0~20.0~50, 10~50, 0~100mv DC (Burnout) V: Up scale at time of abnormal input ~1~1, 0~1, 0~2, 0~5, 1~5, 0~10V DC Input impedance: 500kΩ minimum ● Input scaling function: Scaling possible for voltage (mV, V) or current (mA) input Scaling range: ~1999~9999 counts ● Span: 10~5000 counts Decimal point: (Position) None, 0.0, 0.00, 0.000 ● Sampling cycle: 0.5 seconds ~1999~2000 units ● PV bias: 0~100 seconds ● PV filter: Insulated between input and output (not insulated between input and system)	
Control ● Control mode: Expert PID control with auto tuning function OFF, 0.1~999.9%(ON-OFF action by OFF) Proportional band (P): OFF, 1~6000 seconds (P or PD action by OFF) Integral time (I): OFF, 1~3600 seconds (P or PI action by OFF) Derivative time (D): OFF, 1~3600 seconds (P or PI action by OFF) ● Manual reset: ~50.0~50.0% (Effective when I=OFF) ● ON-OFF hysteresis: 1~999 units (Effective when P=OFF) ● Proportional cycle: 1~120 seconds (for contact and SSR drive voltage output)	
● Control output characteristic: RA (reverse action characteristic)/DA (direct action characteristic) is selectable (Default setting =RA) *P=OFF by default for contact output, others: PID control	
● Type of control/rating: Contact: 1a 240V AC 2A (resistive load) SSR drive voltage: 12V ±1.5V DC (Max load current 30mA) Voltage: 0~10V DC (Max load current 2mA) Current: 4~20mA DC (Max load resistance 600Ω)	
● Control output resolution: Approx. 0.5%(1/200)	
● Isolation: Output isolated from all	
Event output ● Number of events: Total 2 points of EV1 and EV2 as standard Type: Selectable from the following 8 types for EV1 and EV2: No selection, Higher limit deviation, Lower limit deviation, Outside higher/lower limit deviations, Within higher/lower limit deviations, Higher limit absolute value, Lower limit absolute value, Scaleover Absolute values: (both higher limit and lower limit): Within measuring range, Deviations: (both higher limit and lower limit): ~1999~2000 units, Higher/lower limit deviations (within/outside): 0~2000 units ON-OFF action 1~999 units ● Event action: Selectable from the following 4 types (1) None. (2) Standby when power is applied. (3) Standby when power is applied and when SV value in execution is changed. (4) Control mode without standby action (No alarm is output at the time of abnormal input.) Contact (1a × 2 points common)/240V AC 1A (resistive load)	
● Event setting range: 2 LED lamp displays (EV1/EV2)	
● Output type/rating: 0.5 seconds ● Output updating cycle: 2 LED lamp displays (EV1/EV2)	
General Specifications ● Data storage: Non-volatile memory (EEPROM) (Ambient temperature) ~10~50 °C (Ambient humidity) 90%RH or less (no dew condensation) (Altitude) 2000m from the sea level or lower (Category) II, (Degree of pollution) 2 ~20~65 °C	
● Operating conditions: 100-240V AC ±10% 50/60Hz 10VA 240V AC, 6VA 100V AC (Normal mode) 40 dB or higher (50/60 Hz) (Common mode) 120 dB or higher (50/60 Hz) For Voltage (V) input: 90 dB or higher (50/60 Hz)	
● Storage temperature: Safety: IEC61010 and EN61010-1 EMC: EN61326 (Class A: Industrial environment)	
● Supply voltage: Input/output - power supply: 500V DC 20MΩ or above Input/output - contact output: 500V DC 20MΩ or above	
● Power consumption: Input/output - power supply: 2300V AC 1 minute Contact output - power supply: 2300V AC 1 minute	
● Input/noise removal ratio: Only front panel has dust-proof and drip-proof structure NEMA4X and IP66	
● Applicable standards: PPO resin molding (equivalent to UL94V-1) / Ivory	
● Insulation resistance: SR1: H48 × W48 × D111 (Panel depth: 100) mm SR3: H96 × W96 × D111 (Panel depth: 100) mm SR4: H96 × W48 × D111 (Panel depth: 100) mm Push-in panel (one-touch mount)	
● Dielectric strength: 1.0~4.0 mm	
● Protective structure: SR1: H45 × W45 mm / Approx. 150 g SR3: H92 × W92 mm / Approx. 270 g SR4: H92 × W45 mm / Approx. 190 g	
● Material / Color of case:	
● External dimensions:	
● Mounting:	
● Panel thickness:	
● Panel cutout / Weight:	

External Dimensions & Panel Cutout

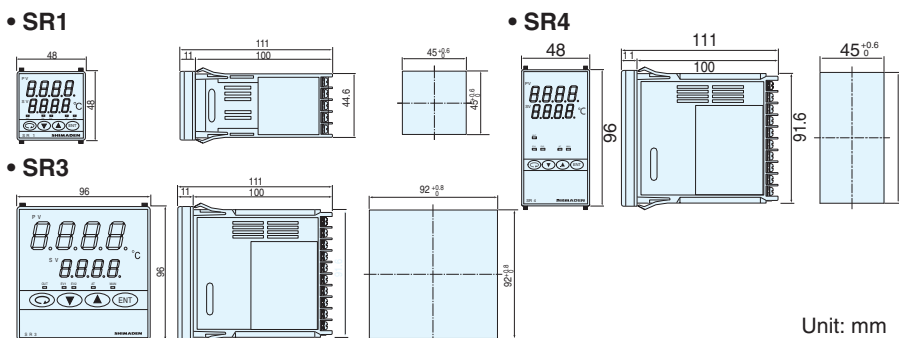

Terminal Arrangement

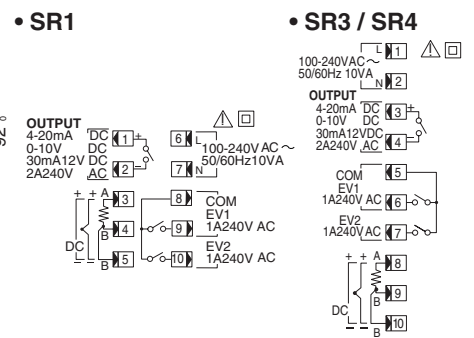

TERMINAL COVER (AVAILABLE SEPARATELY)

Material: PVC, Appearance: transparent, Thickness: 1 mm

Model	Terminal Cover (P/N)	Mounting
SR1	QCR001	One-touch mount
SR3	QCR006	One-touch mount
SR4	QCR004 (Individual Mounting)	Plus screw, B tight, M2.3x6 - 2pcs.
	QCR005 (Tight-lock coupling)	Plus screw, B tight, M2.3x6 - 4pcs.

- Warning** • The SR1/ SR3 / SR4 series are designed for the control of temperature, humidity and other physical values for the general industrial equipment. It is not to be used for any purpose which regulates the prevention of serious effects on human life or safety. No warranty, express or implied is valid if used without proper safety measures.
- Caution** • If the possibility of loss or damage to your system or property as a result of failure of any part of the process exists, proper safety measures must be made before the instrument is put into use as to prevent the occurrence of trouble.

(The contents of this brochure are subject to change without notice.)

Temperature and Humidity Control Specialists

SHIMADEN CO., LTD.

Head Office: 2-30-10 Kitamachi, Nerima-Ku, Tokyo 179-0081 Japan
 Phone: +81-3-3931-7891 Fax: +81-3-3931-3089

E-MAIL: exp-dept@shimaden.co.jp URL: http://www.shimaden.co.jp



08DSR4230ILC